

CATALOG | FEBRUARY 2024

Low voltage

General performance cast iron motors
for Asian markets

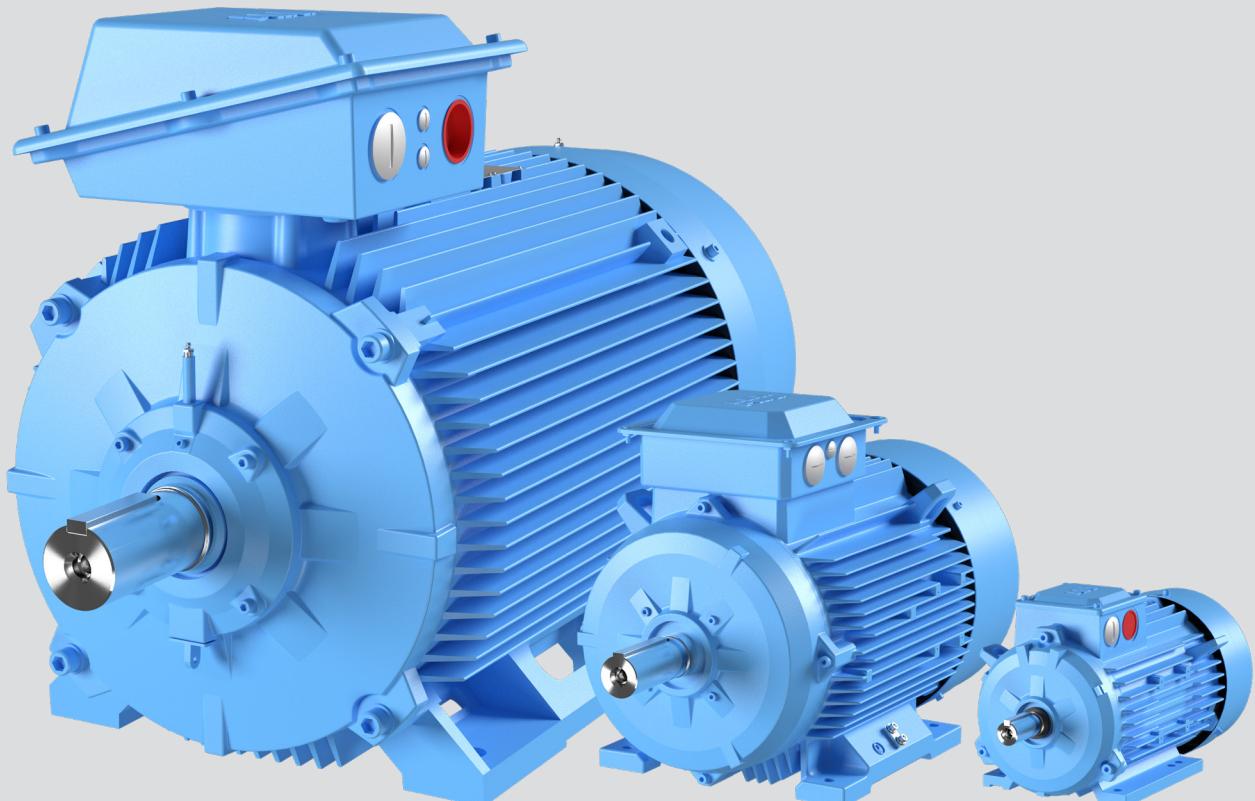

With expertise, and a comprehensive portfolio of products and life-cycle services, we help value-minded industrial customers improve their energy efficiency and productivity.


Low voltage General performance cast iron motors

Sizes 71 to 355, 0.18 to 355 kW

4	General information
4	International motor efficiency standards and regulations
7	Mounting arrangements
8	Cooling
9	Degrees of protection: IP code/IK code
10	Insulation
11	Voltage and frequency
12	Cast iron motors
12	Ordering information
13	Rating plates
14	Technical data IE4
17	Technical data IE3
20	Technical data IE2
23	Technical data IE1
26	Variant codes IE2
29	Variant codes IE3
32	Variant codes IE4
33	Mechanical design
40	Terminal box
42	Dimension drawings IE4
43	Dimension drawings IE3
45	Dimension drawings IE2 and IE1
46	Motors in brief
52	Total product offering
53	ABB's portfolio of drives

General information

International motor efficiency standards and regulations

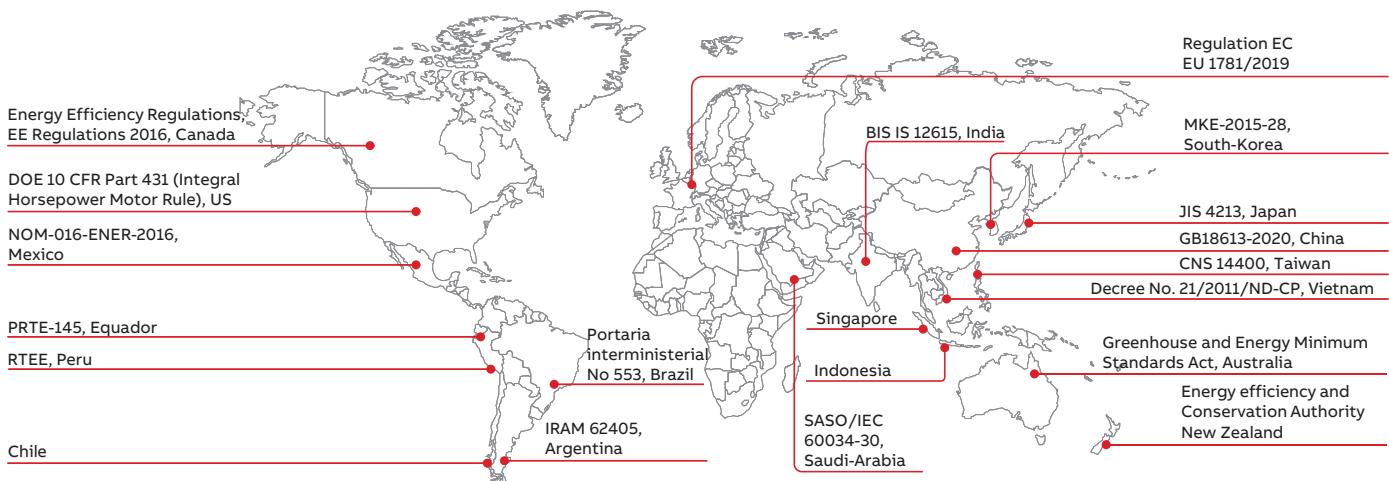

Since the validation of IEC 60034-30:2008 and its refined version IEC 60034-30-1:2014, a worldwide energy efficiency classification system has existed for low voltage three-phase asynchronous motors. These international standards have been created to enable and increase the level of harmonization in efficiency regulations around the world and to also cover motors for explosive atmospheres.

IEC 60034-30-1:2014 defines International Efficiency (IE) classes for single speed, three-phase, 50 Hz and 60 Hz induction motors. The efficiency levels defined in IEC 60034-30-1 are based on the test method specified in IEC 60034-2-1:2014. Both standards are part of an effort to unify motor testing procedures with CSA390-10 and IEEE 112 standards as well as efficiency and product labeling (IE) requirements to enable motor purchasers worldwide to easily recognize premium efficiency products.

To promote transparency in the market, IEC 60034-30-1 states that both the efficiency class and efficiency value must be shown on the motor rating plate and in product documentation. The documentation must clearly indicate the efficiency testing method used as different methods can produce differing results.

Minimum energy performance standards

While the IEC as an international standardization organization sets guidelines for motor testing and efficiency classes, the organization does not regulate efficiency levels in countries. The biggest drivers for mandatory Minimum Energy Performance Standard (MEPS) levels for electric motors are global climate change, government targets to curb CO₂ emissions and rising electricity demand, especially in developing countries. The whole value chain, from manufacturer up to end user, must be aware of the legislation in order to meet local requirements, to save energy and reduce the carbon footprint.

Harmonized global standards and the increasing adoption of MEPS around the world are good news for all of us. However, it is important to remember that harmonization is an ongoing process. Even though MEPS are already in effect in several regions and countries, they are evolving and differ in terms of scope and requirements. At the same time, more countries are planning to adopt their own MEPS regulations. A view of existing and coming MEPS regulations in the world can be seen on the World map above.

To get the latest information please visit www.abb.com/motors&generators/energyefficiency.

IEC 60034-30-1:2014

This standard defines four International Efficiency (IE) classes for single speed electric motors that are rated according to IEC 60034-1 or IEC 60079-0 (explosive atmospheres) and designed for operation on sinusoidal voltage.

- IE4 = Super premium efficiency
- IE3 = Premium efficiency, identical to the table in 10CFR431 ('NEMA Premium') in the USA and CSA C390-10:2015 for 60 Hz
- IE2 = High efficiency
- IE1 = Standard efficiency

IEC 60034-30-1 covers the power range from 0.12 kW up to 1000 kW. Most of the different technical constructions of electric motors are covered as long as they are rated for direct on-line operation. The coverage of the standard includes:

- Single speed electric motors (single and three-phase), 50 and 60 Hz
- 2, 4, 6 and 8 poles
- Rated output P_N from 0.12 kW to 1000 kW
- Rated voltage U_N above 50 V up to 1 kV
- Motors capable of continuous operation at their rated power with a temperature rise within the specified insulation temperature class
- Motors, marked with any ambient temperature within the range of -20 °C to +60 °C
- Motors, marked with an altitude up to 4000 m above sea level


By comparing IEC 60034-30-1 to CSA C390-10:2015 and "10CFR431 Subpart B – Electric motors", it can be seen that the efficiency limits and tables are well aligned and their major difference is in the scope of the output power where CSA and 10CFR431 have a maximum power of 500 hp. There are also some minor differences in the scope of excluded motors.

Note: CFR is Code of Federal Regulations.

The following motors are excluded from IEC 60034-30-1:

- Single-speed motors with 10 or more poles or multi-speed motors
- Motors completely integrated into a machine (for example pump, fan or compressor) that cannot be tested separately from the machine

- Brake motors, when the brake cannot be dismantled or separately fed

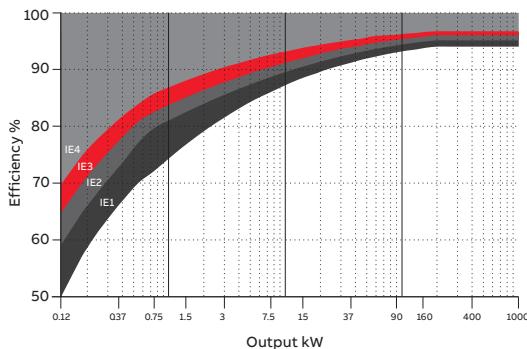

—
01

ABB and efficiency standards

ABB determines efficiency values according to IEC 60034-2-1 using the low uncertainty method (i.e. summarization of losses), with additional load losses determined by the method of residual loss.

It is good to mention and emphasize that the IEC 60034-2-1 test method, which is known as an indirect method, is technically equivalent to the test methods in the standards CSA 390-10 and IEEE 112 Method B leading to the equivalent losses and thus efficiency values. Both test methods can be used by ABB and shall be used for both Canada and the US where IEC 60034-2-1 is not recognized yet.

As the world market leader, ABB offers the largest range of LV motors available. It has long advocated the need for efficiency in motors, and high efficiency products have formed the core of its portfolio for many years. The core of ABB's Process performance range is based on a full range of IE2 and IE3 motors - with many available from stock. We also supply IE4 motors for additional energy savings.


Nominal efficiency limits defined in IEC 60034-30-1:2014 (reference values at 50 Hz, based on test methods specified in IEC 60034-2-1:2014).

Output kW	IE1 Standard efficiency				IE2 High efficiency				IE3 Premium efficiency				IE4 Super Premium efficiency			
	2 pole	4 pole	6 pole	8 pole	2 pole	4 pole	6 pole	8 pole	2 pole	4 pole	6 pole	8 pole	2 pole	4 pole	6 pole	8 pole
0.12	45.0	50.0	38.3	31.0	53.6	59.1	50.6	39.8	60.8	64.8	57.7	50.7	66.5	69.8	64.9	62.3
0.18	52.8	57.0	45.5	38.0	60.4	64.7	56.6	45.9	65.9	69.9	63.9	58.7	70.8	74.7	70.1	67.2
0.20	54.6	58.5	47.6	39.7	61.9	65.9	58.2	47.4	67.2	71.1	65.4	60.6	71.9	75.8	71.4	68.4
0.25	58.2	61.5	52.1	43.4	64.8	68.5	61.6	50.6	69.7	73.5	68.6	64.1	74.3	77.9	74.1	70.8
0.37	63.9	66.0	59.7	49.7	69.5	72.7	67.6	56.1	73.8	77.3	73.5	69.3	78.1	81.1	78.0	74.3
0.40	64.9	66.8	61.1	50.9	70.4	73.5	68.8	57.2	74.6	78.0	74.4	70.1	78.9	81.7	78.7	74.9
0.55	69.0	70.0	65.8	56.1	74.1	77.1	73.1	61.7	77.8	80.8	77.2	73.0	81.5	83.9	80.9	77.0
0.75	72.1	72.1	70.0	61.2	77.4	79.6	75.9	66.2	80.7	82.5	78.9	75.0	83.5	85.7	82.7	78.4
1.1	75.0	75.0	72.9	66.5	79.6	81.4	78.1	70.8	82.7	84.1	81.0	77.7	85.2	87.2	84.5	80.8
1.5	77.2	77.2	75.2	70.2	81.3	82.8	79.8	74.1	84.2	85.3	82.5	79.7	86.5	88.2	85.9	82.6
2.2	79.7	79.7	77.7	74.2	83.2	84.3	81.8	77.6	85.9	86.7	84.3	81.9	88.0	89.5	87.4	84.5
3	81.5	81.5	79.7	77.0	84.6	85.5	83.3	80.0	87.1	87.7	85.6	83.5	89.1	90.4	88.6	85.9
4	83.1	83.1	81.4	79.2	85.8	86.6	84.6	81.9	88.1	88.6	86.8	84.8	90.0	91.1	89.5	87.1
5.5	84.7	84.7	93.1	81.4	87.0	87.7	86.0	83.8	89.2	89.6	88.0	86.2	90.9	91.9	90.5	88.3
7.5	86.0	86.0	84.7	83.1	88.1	88.7	87.2	85.3	90.1	90.4	89.1	87.3	91.7	92.6	91.3	89.3
11	87.6	87.6	86.4	85.0	89.4	89.8	88.7	86.9	91.2	91.4	90.3	88.6	92.6	93.3	92.3	90.4
15	88.7	88.7	87.7	86.2	90.3	90.6	89.7	88.0	91.9	92.1	91.2	89.6	93.3	93.9	92.9	91.2
18.5	89.3	89.3	88.6	86.9	90.9	91.2	90.4	88.6	92.5	92.6	91.7	90.1	93.7	94.2	93.4	91.7
22	89.9	89.9	89.2	87.4	91.3	91.6	90.9	89.1	92.7	93.0	92.2	90.6	94.0	94.5	93.7	92.1
30	90.7	90.7	90.2	88.3	92.0	92.3	91.7	89.8	93.3	93.6	92.9	91.3	94.5	94.9	94.2	92.7
37	91.2	91.2	90.8	88.8	92.5	92.7	92.2	90.3	93.7	93.9	93.3	91.8	94.8	95.2	94.5	93.1
45	91.7	91.7	91.4	89.2	92.9	93.1	92.7	90.7	94.0	94.2	93.7	92.2	95.0	95.4	94.8	93.4
55	92.1	92.1	91.9	89.7	93.2	93.5	93.1	91.0	94.3	94.6	94.1	92.5	95.3	95.7	95.1	93.7
75	92.7	92.7	92.6	90.3	93.8	94.0	93.7	91.6	94.7	95.0	94.6	93.1	95.6	96.0	95.4	94.2
90	93.0	93.0	92.9	90.7	94.1	94.2	94.0	91.9	95.0	95.2	94.9	93.4	95.8	96.1	95.6	94.4
110	93.3	93.3	93.3	91.1	94.3	94.5	94.3	92.3	95.2	95.4	95.1	93.7	96.0	96.3	95.8	94.7
132	93.5	93.5	93.5	91.5	94.6	94.7	94.6	92.6	95.4	95.6	95.4	94.0	96.2	96.4	96.0	94.9
160	93.8	93.8	93.8	91.9	94.8	94.9	94.8	93.0	95.6	95.8	95.6	94.3	96.3	96.6	96.2	95.1
200	94.0	94.0	94.0	92.5	95.0	95.1	95.0	93.5	95.8	96.0	95.8	94.6	96.5	96.7	96.3	95.4
250	94.0	94.0	94.0	92.5	95.0	95.1	95.0	93.5	95.8	96.0	95.8	94.6	96.5	96.7	96.5	95.4
315	94.0	94.0	94.0	92.5	95.0	95.1	95.0	93.5	95.8	96.0	95.8	94.6	96.5	96.7	96.6	95.4
355	94.0	94.0	94.0	92.5	95.0	95.1	95.0	93.5	95.8	96.0	95.8	94.6	96.5	96.7	96.6	95.4
400	94.0	94.0	94.0	92.5	95.0	95.1	95.0	93.5	95.8	96.0	95.8	94.6	96.5	96.7	96.6	95.4
450	94.0	94.0	94.0	92.5	95.0	95.1	95.0	93.5	95.8	96.0	95.8	94.6	96.5	96.7	96.6	95.4
500– 1000	94.0	94.0	94.0	92.5	95.0	95.1	95.0	93.5	95.8	96.0	95.8	94.6	96.5	96.7	96.6	95.4

Mounting arrangements

Foot-mounted motor

Code I / code II



IM B3	IM V5	IM V6	IM B6	IM B7	IM B8
IM 1001	IM 1011	IM 1031	IM 1051	IM 1061	IM 1071

Product code pos. 12


A: foot-mounted, term. box top

R: foot-mounted, term. box RHS

L: foot-mounted, term. box LHS

Flange-mounted motor, large flange

Code I / code II




IM B5	IM V1	IM V3	*)	*)	*)
IM 3001	IM 3011	IM 3031	IM 3051	IM 3061	IM 3071

Product code pos. 12

B: flange mounted, large flange

Flange-mounted motor, small flange

Code I / code II




IM B14	IM V18	IM V19	*)	*)	*)
IM 3601	IM 3611	IM 3631	IM 3651	IM 3661	IM 3671

Product code pos. 12

C: flange mounted, small flange

Foot- and flange-mounted motor with feet, large flange

Code I / code II



IM B35	IM V15	IM V35	*)	*)	*)
IM 2001	IM 2011	IM 2031	IM 2051	IM 2061	IM 2071

Product code pos. 12


H: foot/flange-mounted, term. box top

S: foot/flange-mounted, term. box RHS

T: foot/flange-mounted, term. box LHS

Foot- and flange-mounted motor with feet, small flange

Code I / code II




IM B34	IM V17				
IM 2101	IM 2111	IM 2131	IM 2151	IM 2161	IM 2171

Product code pos. 12

J: foot/flange-mounted, small flange

Foot-mounted motor, shaft with free extensions

Code I / code II



IM 1002	IM 1012	IM 1032	IM 1052	IM 1062	IM 1072
---------	---------	---------	---------	---------	---------

Product code pos. 12

*) Not stated in IEC 60034-7.

Note: If the motor is mounted shaft upwards, take measures to prevent water or any other liquid from running down the shaft into the motor.

General information

Cooling

Designation system concerning methods of cooling refers to standard IEC 60034-6.

Explanation of the product code

International Cooling	Circuit arrangement	Primary coolant	Method of movement of primary coolant	Secondary coolant	Method of movement of secondary coolant
IC	4	(A)	1	(A)	6
1	2	3	4	5	

Position 1

0:	Free circulation (open circuit)
4:	Free circulation (open circuit)

Position 2

A:	For air (omitted for simplified designation)
----	--

Position 3

0:	Free convection
1:	Self-circulation
6:	Machine-mounted independent component

Position 4

A:	For air (omitted for simplified designation)
W:	For water

Position 5

0:	Free convection
1:	Self-circulation
6:	Machine-mounted independent component
8:	Relative displacement

General information

Degrees of protection: IP code/IK code

Classification of degrees of protection provided by enclosures of rotating machines refers to:

- Standard IEC 60034-5 or EN 60529 for IP code
- Standard EN 50102 for IK code

IP protection

Protection of persons against getting in contact with (or approaching) live parts and against contact with moving parts inside the enclosure. Also protection of the machine against ingress of solid foreign objects. Protection of machines against the harmful effects due to the ingress of water.

Explanation of the IP code

Ingress protection	Degree of protection to persons and to parts of the motors inside the enclosure	Degree of protection provided by the enclosure with respect to harmful effects due to ingress of water
IP	5	5
	1	2

Position 1

2:	Motors protected against solid objects greater than 12 mm
4:	Motors protected against solid objects greater than 1 mm
5:	Dust-protected motors
6:	Dust-tight motors

Position 2

3:	Motors protected against spraying water
4:	Motors protected against splashing water
5:	Motors protected against water jets
6:	Motors protected against heavy seas

IK code

Classification of degrees of protection provided by enclosure for motors against external mechanical impacts.

Explanation of the IK code

International mechanical protection	Characteristic group
IK	08
	1

Position 1

Relation between IK code and impact energy:

IK code	Impact energy/Joule
0:	Not protected according to EN 50102
01:	0.15
02:	0.2
03:	0.35
04:	0.5
05:	0.7
06:	1
07:	2
08:	5 (ABB Standard)
09:	10
10:	20

Insulation

—
01 Safety margins per thermal class

ABB uses class F insulation, which, with temperature rise B, is the most common requirement among industry today.

The use of class F insulation with class B temperature rise gives ABB products a 25 °C safety margin. This can be used to increase the loading for limited periods, to operate at higher ambient temperatures or altitudes, or with greater voltage and frequency tolerances. It can also be used to extend insulation. For instance, a 10 K temperature reduction will extend the insulation life.

Thermal class 130 (B)


- Nominal ambient temperature 40 °C
- Max permissible temperature rise 80 K
- Hot spot temperature margin 10 K

Thermal class 155 (F)

- Nominal ambient temperature 40 °C
- Max permissible temperature rise 105 K
- Hot spot temperature margin 10 K

Thermal class 180 (H)

- Nominal ambient temperature 40 °C
- Max permissible temperature rise 125 K
- Hot spot temperature margin 15 K

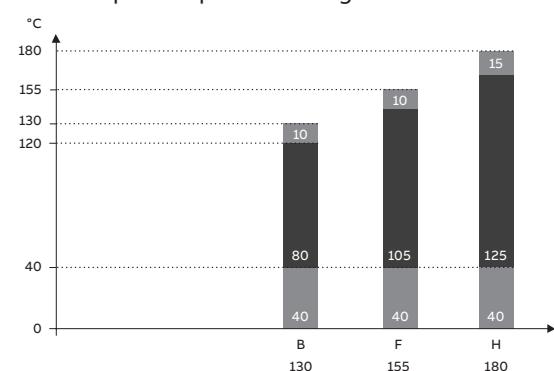

—
01

General information

Voltage and frequency


—
01 Voltage and frequency deviation in zones A and B

The impact on temperature rise caused by voltage and frequency fluctuation is defined in IEC 60034-1. The standard divides the combinations into two zones, A and B. Zone A is the combination of voltage deviation of $+/-5\%$ and frequency deviation of $+/-2\%$. Zone B is the combination of voltage deviation of $+/-10\%$ and frequency deviation of $+3/-5\%$. This is illustrated in figure below.

Motors are capable of supplying the rated torque in both zones A and B, but the temperature rise will be higher than at rated voltage and frequency. Motors can be run in zone B only for a short period of time.

Key

X axis	frequency p.u.
Y axis	voltage p.u.
1	zone A
2	zone B (outside zone A)
3	rating point

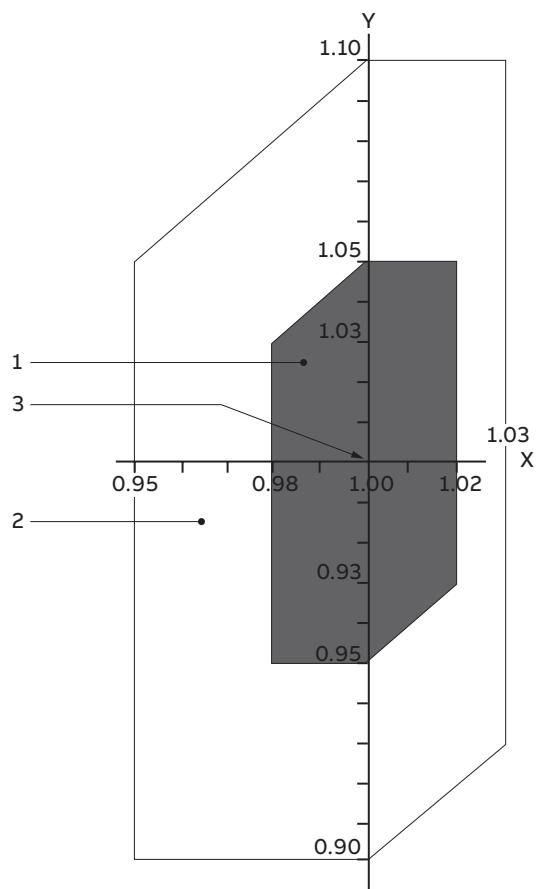

—
01

Ordering information

Explanation of the product code

Motor type	Motor size	Product code	Mounting arrangement code, Voltage and frequency code, Generation code	Variant codes
				1 2 3 4 5 6 7 8 9 10 11 12 13 14
M2BAX 112MA 3GBA 112 310 - ADD				002, etc.

Positions 1 to 4

3GBA: Totally enclosed fan cooled squirrel cage motor with cast iron frame

Positions 5 and 6

IEC size

- 07: 71
- 08: 80
- 09: 90
- 10: 100
- 11: 112
- 13: 132
- 16: 160
- 18: 180
- 20: 200
- 22: 225
- 25: 250
- 28: 280
- 31: 315
- 35: 355

Position 7

Speed (Pole pairs)

- 1: 2 poles
- 2: 4 poles
- 3: 6 poles

Positions 8 to 10

Running number

Position 11

-(dash)

Position 12 (marked with black dot in data tables)

Mounting arrangement

- A: Foot-mounted, top-mounted terminal box
- B: Flange-mounted, large flange

Position 13 (marked with black dot in data tables) Voltage and frequency

Voltage and frequency

Position 13 (marked with black dot in data tables)

Single-speed motors

- D: 400 V Δ , 690 VY, 380 V Δ , 660 VY, 50 Hz
- S: 230 V Δ , 400 VY, 220 V Δ , 380 VY, 50 Hz


Position 14

A, B, C... = Generation code followed by variant codes

Efficiency values are given according to IEC 60034-2-1; 2014.

For detailed dimension drawings please see our web-pages 'www.abb.com/motors&generators' or contact ABB.

Rating plates

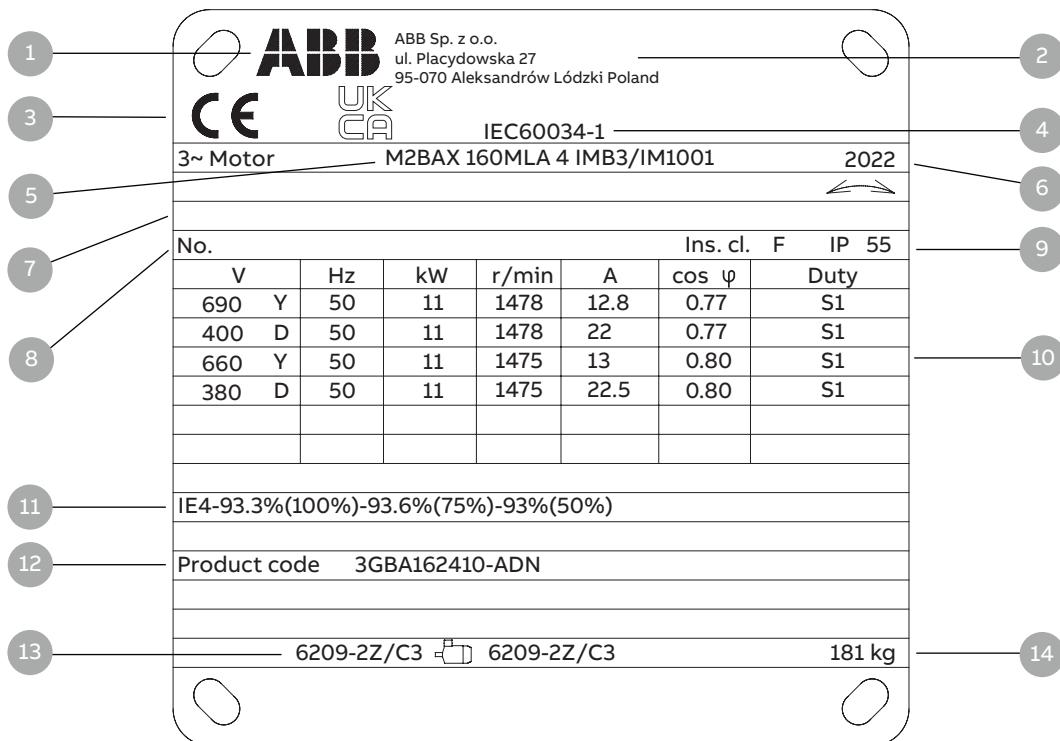

- 1 ABB Logo
- 2 Manufacturing place
- 3 CE mark for fulfilling European Directives and Regulations
- 4 Manufacturing standard
- 5 Product description
- 6 Manufacturing year
- 7 Factory order reference number
- 8 Serial number
- 9 Insulation class, IP protection class
- 10 Voltage, Frequency, output, speed, current, power factory, duty
- 11 Efficiency class and efficiency 50 Hz at 100%, 75%, 50%; 60 Hz at 100%
- 12 Product code
- 13 Bearing type
- 14 Weight

Technical data

IE4 General performance cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE4 efficiency class according to IEC 60034-30-1; 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current		Torque		Moment of inertia $J = 1/4$ $GD_2 \text{kgm}_2$	Weight kg	Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor Cos	I_n A	I_s/I_n	T_n Nm	T_i/T_n	T_b/T_n			
3000 r/min = 2 poles			400 V 50Hz					CENELEC-design							
0,75	M2BAX 80MA 2	3GBA081310---N	2887	83.5	83.9	82.3	0.83	1.56	7.8	2.5	3.6	3.9	0.00108	18	59
1,1	M2BAX 80MLA 2	3GBA081410---N	2884	85.2	86.1	85.2	0.84	2.2	8.0	3.7	3.8	4.0	0.00144	22	59
1,5	M2BAX 90SA 2	3GBA091110---N	2915	86.5	87.4	86.6	0.87	2.9	8.6	4.9	3.3	4.1	0.0027	26	59
2,2	M2BAX 90SLA 2	3GBA091010---N	2925	88.0	88.8	88.2	0.88	4.1	9.6	7.2	3.6	4.7	0.0038	34	60
3	M2BAX 100LKA 2	3GBA101810---N	2892	89.1	90.7	91.1	0.89	5.5	8.2	10.1	3.0	3.8	0.00641	50	59
4	M2BAX 112MLA 2	3GBA111410---N	2893	90.0	88.2	88.6	0.88	7.3	8.3	13.2	2.8	3.6	0.00828	56	62
5,5	M2BAX 132SA 2	3GBA131110---N	2910	90.9	91.4	91.2	0.86	10.1	8.3	18.0	2.4	3.6	0.014	76	65
7,5	M2BAX 132SMA 2	3GBA131210---N	2910	91.7	92.6	92.7	0.89	13.3	8.2	24.6	2.4	3.5	0.0166	88	65
11	M2BAX 160MLA 2	3GBA161410---N	2953	92.6	92.9	92.4	0.88	19.5	8.3	35.6	3.3	4.1	0.0514	143	69
15	M2BAX 160MLB 2	3GBA161420---N	2951	93.3	93.5	92.9	0.89	26.2	10.2	48.5	3.9	4.5	0.063	162	70
18,5	M2BAX 160MLC 2	3GBA161430---N	2942	93.7	94.1	94.0	0.90	31.8	9.6	60.1	3.7	4.1	0.076	175	70
22	M2BAX 180MLA 2	3GBA181410---N	2959	94.0	94.3	93.9	0.88	38.3	8.9	71.0	3.5	4.1	0.126	231	74
30	M2BAX 200MLA 2	3GBA201410---N	2961	94.5	94.7	94.4	0.88	52.1	8.8	96.8	3.6	3.7	0.196	283	79
37	M2BAX 200MLB 2	3GBA201420---N	2962	94.8	95.1	94.8	0.87	64.8	9.2	119	3.2	3.7	0.217	288	78
45	M2BAX 225SMA 2	3GBA221210---N	2976	95.0	95.1	94.5	0.88	78.0	9.5	144	4.1	3.5	0.295	372	81
55	M2BAX 250SMA 2	3GBA251210---N	2974	95.3	95.5	95.0	0.90	93.0	8.4	177	3.3	3.6	0.547	459	79
75	M2BAX 280SMA 2	3GBA281210---N	2980	95.6	95.6	94.9	0.87	130	7.3	240	2.5	2.9	0.9	709	77
90	M2BAX 280SMB 2	3GBA281220---N	2981	95.8	95.6	95.0	0.88	154	8.0	288	3.0	3.1	1.15	782	77
110	M2BAX 315SMA 2	3GBA311210---N	2982	96.0	96.0	95.3	0.87	190	6.7	352	1.9	2.6	1.4	1028	77
132	M2BAX 315SMB 2	3GBA311220---N	2986	96.2	96.3	95.9	0.87	228	7.9	422	2.4	3.0	1.7	1096	77
160	M2BAX 315MLA 2	3GBA311410---N	2983	96.3	96.5	96.3	0.89	269	7.3	512	2.2	2.7	2.1	1319	77
200	M2BAX 315MLB 2	3GBA311420---N	2983	96.5	96.9	96.8	0.89	336	6.8	640	1.9	2.6	2.2	1358	77
250	M2BAX 355SMA 2	3GBA351210---N	2983	96.5	96.6	96.2	0.89	420	7.6	800	2.2	2.0	3.4	1590	83
315	M2BAX 355SMB 2	3GBA351220---N	2984	96.5	96.5	95.9	0.88	535	7.8	1008	2.3	2.8	3.6	1668	83
355	M2BAX 355MLA 2	3GBA351410---N	2981	96.5	96.8	96.4	0.89	597	7.5	1137	2.3	2.6	4.1	1845	83

Technical data

IE4 General performance cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

General efficiency class according to IEC 60034-30-1; 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current			Torque		Moment of inertia $J = 1/4$ $GD_2 \text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor Cos	I_n/A	I_s/I_n	T_N/Nm	T_i/T_N	T_b/T_N			
1500 r/min = 4 poles			400 V 50Hz					CENELEC-design							
0,55	M2BAX 80MLA 4	3GBA082410--N	1449	83.9	84.3	82.6	0.81	1.17	7.0	3.6	3.2	3.8	0.0028	22	47
2,2	M2BAX 100LKA 4	3GBA102810--N	1465	89.5	90.9	89.5	0.80	4.4	8.2	14.4	2.2	3.2	0.015	46	53
3	M2BAX 100LKB 4	3GBA102820--N	1464	90.4	91.1	90.7	0.81	5.9	8.3	19.8	2.5	3.5	0.021	52	54
4	M2BAX 112MLA 4	3GBA112410--N	1461	91.1	91.7	91.3	0.79	8.0	8.5	26.4	2.6	3.8	0.0189	62	56
5,5	M2BAX 132SA 4	3GBA132110--N	1473	91.9	92.1	91.1	0.79	11.0	8.3	35.6	2.4	3.7	0.044	90	64
7,5	M2BAX 132SMA 4	3GBA132210--N	1473	92.6	92.9	92.1	0.80	14.7	8.4	48.6	2.5	3.7	0.057	102	64
11	M2BAX 160MLA 4	3GBA162410--N	1478	93.3	93.6	93.0	0.77	22.0	8.2	71.1	3.0	3.9	0.123	181	59
15	M2BAX 160MLB 4	3GBA162420--N	1476	93.9	94.1	93.8	0.74	31.0	8.9	97.1	3.7	4.1	0.127	178	59
18,5	M2BAX 180MLA 4	3GBA182410--N	1484	94.2	94.3	93.5	0.81	35.0	9.2	119	3.5	4.2	0.191	205	65
22	M2BAX 180MLB 4	3GBA182420--N	1484	94.5	94.6	94.0	0.82	41.0	9.2	142	3.5	4.1	0.22	220	65
30	M2BAX 200MLA 4	3GBA202410--N	1488	94.9	94.9	94.1	0.75	60.8	9.3	193	4.3	4.2	0.369	268	64
37	M2BAX 225SMA 4	3GBA222210--N	1483	95.2	95.5	95.3	0.83	67.3	9.0	239	3.8	3.6	0.54	380	64
45	M2BAX 225SMB 4	3GBA222220--N	1481	95.4	95.7	95.6	0.82	82.7	8.7	290	3.8	3.5	0.54	380	64
55	M2BAX 250SMA 4	3GBA252210--N	1485	95.7	95.8	95.3	0.85	97.3	9.9	354	4.7	3.8	0.939	483	69
75	M2BAX 280SMA 4	3GBA282210--N	1487	96.0	96.4	96.1	0.86	131	7.8	481	2.8	2.9	1.85	787	72
90	M2BAX 280SMB 4	3GBA282220--N	1486	96.1	96.3	96.1	0.84	161	8.3	580	3.2	3.4	1.88	811	63
110	M2BAX 315SMA 4	3GBA312210--N	1491	96.3	96.4	96.0	0.85	194	7.9	705	2.4	3.1	2.64	905	66
132	M2BAX 315SMB 4	3GBA312220--N	1489	96.4	96.6	96.1	0.84	235	7.9	846	2.6	3.2	3.02	961	68
160	M2BAX 315MLA 4	3GBA312410--N	1490	96.6	96.8	96.5	0.86	278	7.9	1026	2.7	3.1	3.63	1106	68
200	M2BAX 315LKA 4	3GBA312810--N	1490	96.7	96.9	96.7	0.86	347	7.8	1282	2.4	3.6	4.74	1332	66
250	M2BAX 355SMA 4	3GBA352210--N	1490	96.7	96.9	96.6	0.85	439	7.8	1601	2.5	2.9	6.49	1646	74
315	M2BAX 355SMB 4	3GBA352220--N	1490	96.7	96.9	96.8	0.83	566	7.4	2018	2.8	2.9	7.2	1738	74
355	M2BAX 355MLA 4	3GBA352410--N	1491	96.7	96.9	96.6	0.85	623	7.4	2271	2.7	4.1	8.4	2001	77

Technical data

IE4 General performance cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

General efficiency class according to IEC 60034-30-1; 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current			Torque			Moment of inertia $J = 1/4$ $GD_2 \text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor Cos	I_n	I_s/I_n	T_N Nm	T_i/T_N	T_b/T_N				
1000 r/min = 6 poles			400 V 50Hz					CENELEC-design								
0,37	M2BAX 80MLA 6	3GBA083410---N	956	78.0	77.8	74.4	0.72	0.95	4.8	3.7	2.3	3.0	0.0038	22	46	
0,55	M2BAX 80MLB 6	3GBA083420---N	957	80.9	80.5	77.3	0.69	1.42	5.1	5.5	2.7	3.4	0.0044	24	47	
0,75	M2BAX 90SLA 6	3GBA093010---N	948	82.7	82.7	81.3	0.72	1.82	4.9	7.6	2.7	3.1	0.0061	32	55	
1,5	M2BAX 100LKA 6	3GBA103810---N	969	85.9	85.8	84.2	0.73	3.5	7.3	14.9	2.5	3.6	0.0121	46	47	
2,2	M2BAX 112MLA 6	3GBA113410---N	980	87.4	88.1	87.1	0.68	5.4	7.1	21.4	2.3	3.3	0.022	56	46	
3	M2BAX 132SA 6	3GBA133110---N	983	88.6	88.9	87.4	0.68	7.2	7.1	29.1	2.2	3.4	0.042	73	57	
4	M2BAX 132SMA 6	3GBA133210---N	983	89.5	89.9	88.6	0.68	9.5	7.4	38.9	2.4	3.5	0.053	86	57	
5,5	M2BAX 132SMB 6	3GBA133220---N	981	90.5	91.1	90.5	0.71	12.4	7.3	53.5	2.3	3.3	0.068	99	57	
7,5	M2BAX 160MLA 6	3GBA163410---N	984	91.3	91.0	89.4	0.75	15.8	7.1	72.8	1.8	3.6	0.133	170	59	
11	M2BAX 160MLB 6	3GBA163420---N	980	92.3	92.3	91.7	0.76	22.8	7.3	109	1.9	3.4	0.133	190	59	
15	M2BAX 180MLA 6	3GBA183410---N	985	92.9	92.8	91.8	0.71	32.8	7.2	147	2.7	3.7	0.229	227	59	
18,5	M2BAX 200MLA 6	3GBA203410---N	990	93.4	93.8	93.4	0.78	36.6	7.6	178	2.9	3.7	0.448	264	62	
22	M2BAX 200MLB 6	3GBA203420---N	989	93.7	93.8	93.3	0.79	42.9	7.8	212	3.0	3.8	0.531	291	63	
30	M2BAX 225SMA 6	3GBA223210---N	988	94.2	94.5	94.2	0.80	57.6	8.0	290	3.6	3.7	0.813	372	63	
37	M2BAX 250SMA 6	3GBA253210---N	991	94.5	94.9	94.6	0.81	69.6	8.1	356	3.4	3.3	1.5	478	62	
45	M2BAX 280SMA 6	3GBA283210---N	990	94.8	95.1	94.7	0.84	81.3	8.2	434	3.1	2.8	2.04	634	63	
55	M2BAX 280SMB 6	3GBA283220---N	990	95.1	95.4	95.1	0.84	99.9	7.1	530	2.9	2.7	2.57	728	63	
75	M2BAX 315SMA 6	3GBA313210---N	994	95.4	95.7	95.0	0.82	138	7.8	721	2.7	3.2	4.76	926	67	
90	M2BAX 315SMB 6	3GBA313220---N	993	95.6	95.8	95.3	0.80	170	7.9	865	2.6	3.1	5.19	933	67	
110	M2BAX 315MLA 6	3GBA313410---N	993	95.8	96.1	95.8	0.82	202	7.7	1058	2.3	2.7	6.16	1106	68	
132	M2BAX 315LKA 6	3GBA313810---N	993	96.0	96.2	96.1	0.83	239	6.8	1270	2.5	3.2	7.16	1288	62	
160	M2BAX 355SMA 6	3GBA353210---N	994	96.2	96.2	96.1	0.82	292	7.3	1537	2.5	3.1	9.5	1587	73	
200	M2BAX 355SMB 6	3GBA353220---N	994	96.3	96.5	96.0	0.81	370	8.1	1921	2.6	3.2	11.3	1734	73	
250	M2BAX 355MLA 6	3GBA353410---N	994	96.5	96.8	96.7	0.83	451	6.2	2403	2.0	3.5	13.2	1984	70	

Technical data

IE3 General performance cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE3 efficiency class according to IEC 60034-30-1; 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current			Torque			Moment of inertia $J = 1/4$ $GD_2 \text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor Cos	I_n/A	I_s/I_n	$T_N \text{Nm}$	T_i/T_N	T_b/T_N				
3000 r/min = 2 poles			400 V 50Hz					CENELEC-design								
0,37	M2BAX 71MC 2	3GBA071330---D	2819	76.5	76.0	73.4	0.80	0.86	6.6	1.3	2.7	3.2	0.00035	10	50	
0,55	M2BAX 71MB 2	3GBA071320---D	2816	78.4	78.1	75.9	0.80	1.27	6.1	1.9	2.7	3.2	0.00040	10	49	
0,75	M2BAX 80MC 2	3GBA081330---D	2891	80.7	81.0	78.9	0.80	1.66	7.5	2.5	2.9	3.7	0.00081	16	58	
1,1	M2BAX 80MD 2	3GBA081340---D	2860	82.7	83.3	82.6	0.84	2.29	7.6	3.7	3.2	3.6	0.0010	17	60	
1,5	M2BAX 90SB 2	3GBA091120---D	2899	84.2	84.4	83.4	0.86	2.99	8.3	4.9	2.8	3.7	0.0023	23	59	
2,2	M2BAX 90SLA 2	3GBA091010---D	2903	85.9	86.1	85.3	0.86	4.30	9.1	7.2	3.3	4.1	0.0030	26	67	
3	M2BAX 100LKA 2	3GBA101810---D	2904	87.1	88.1	88.3	0.91	5.46	9.3	9.9	2.6	3.4	0.0069	42	62	
4	M2BAX 112MB 2	3GBA111320---D	2909	88.1	88.6	88.1	0.92	7.12	9.6	13.1	3.5	4.3	0.0071	42	64	
5,5	M2BAX 132SMA 2	3GBA131210---D	2934	89.2	89.8	89.0	0.82	10.6	8.9	17.9	2.4	4.1	0.014	64	65	
7,5	M2BAX 132SMB 2	3GBA131220---D	2921	90.1	91.0	90.9	0.84	14.0	9.0	24.5	2.6	4.0	0.017	60	65	
11	M2BAX 160MLA 2	3GBA161410---F	2943	91.2	92.0	91.6	0.91	19.1	7.2	35.6	2.6	3.6	0.057	121	69	
15	M2BAX 160MLB 2	3GBA161420---F	2939	91.9	92.1	91.9	0.87	27.1	7.8	48.7	2.8	3.4	0.063	128	69	
18,5	M2BAX 160MLC 2	3GBA161430---F	2949	92.4	93.0	92.6	0.90	32.0	9.0	59.8	3.3	3.9	0.076	145	73	
22	M2BAX 180MLA 2	3GBA181410---F	2946	92.7	92.8	92.3	0.87	39.4	9.0	71.4	3.5	3.9	0.073	152	71	
30	M2BAX 200MLA 2	3GBA201410---F	2959	93.3	93.5	92.9	0.90	51.7	9.5	96.8	3.6	4.0	0.14	250	80	
37	M2BAX 200MLB 2	3GBA201420---F	2951	93.7	93.9	93.3	0.89	63.9	8.1	120	3.4	3.6	0.16	268	72	
45	M2BAX 225SMA 2	3GBA221210---F	2960	94.0	94.5	94.6	0.88	78.5	8.9	145	3.6	3.4	0.22	278	76	
55	M2BAX 250SMA 2	3GBA251210---F	2966	94.3	94.4	94.0	0.87	96.7	7.6	177	3.4	3.1	0.34	335	78	
75	M2BAX 280SMF 2	3GBA281260---F	2971	94.7	94.7	94.0	0.89	129	7.7	241	2.7	3.3	0.6	527	78	
90	M2BAX 280SMG 2	3GBA281270---F	2970	95.0	95.3	95.2	0.91	152	8.0	289	3.1	3.3	0.7	576	76	
110	M2BAX 315SMB 2	3GBA311220---M	2982	95.2	94.9	93.9	0.87	192	7.0	352	1.8	2.7	1.3	801	78	
132	M2BAX 315SMC 2	3GBA311230---M	2982	95.4	95.4	94.6	0.87	229	6.8	422	2.0	2.8	1.5	852	78	
160	M2BAX 315SMD 2	3GBA311240---M	2983	95.6	95.6	94.9	0.87	275	7.4	512	2.2	2.8	1.7	909	78	
200 ¹⁾	M2BAX 315MLA 2	3GBA311410---M	2983	95.8	96.0	95.5	0.88	342	7.5	640	2.3	3.1	2.1	1051	81	
250	M2BAX 355SMA 2	3GBA351210---M	2985	95.8	95.6	94.6	0.89	423	7.7	800	2.1	3.3	3.0	1412	83	
315	M2BAX 355SMB 2	3GBA351220---M	2980	95.8	95.7	95.0	0.89	529	7.0	1009	2.1	3.0	3.4	1495	83	
355	M2BAX 355SMC 2	3GBA351230---M	2984	95.8	95.8	95.0	0.88	605	7.2	1136	2.2	3.0	3.6	1565	83	

¹⁾ Temperature rise class F

Technical data

IE3 General performance cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE3 efficiency class according to IEC 60034-30-1; 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current			Torque			Moment of inertia $J = 1/4$ $GD_2 \text{kgm}_2$	Weight kg	Sound pressure Level L_{PA} dB
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor Cos	I_n A	I_s/I_n	T_n Nm	T_f/T_n	T_b/T_n				
1500 r/min = 4 poles			400 V 50Hz					CENELEC-design								
0,25	M2BAX 71MB 4	3GBA072320--D	1440	73.5	70.1	63.8	0.64	0.78	6.1	1.7	2.7	3.5	0.00075	10	41	
0,37	M2BAX 71MLA 4	3GBA072410--D	1441	77.3	74.9	69.8	0.66	1.06	6.8	2.5	2.7	3.8	0.00098	12	50	
0,55	M2BAX 80MC 4	3GBA082330--D	1445	80.8	80.8	78.1	0.75	1.31	7.8	3.6	2.6	3.9	0.0023	17	48	
0,75	M2BAX 80MLA 4	3GBA082410--D	1427	82.5	82.7	81.5	0.78	1.68	6.7	5.0	2.1	3.2	0.0030	21	49	
1,1	M2BAX 90SB 4	3GBA092120--D	1434	84.1	83.5	82.1	0.73	2.59	7.1	7.3	3.6	4.0	0.0039	23	48	
1,5	M2BAX 90SLA 4	3GBA092010--D	1439	85.3	84.7	82.7	0.78	3.25	8.0	10.0	3.8	4.4	0.0049	25	55	
2,2	M2BAX 100LB 4	3GBA102520--D	1437	86.7	87.6	87.0	0.83	4.38	7.5	14.6	2.7	3.4	0.0086	34	61	
3	M2BAX 100LKA 4	3GBA102810--D	1440	87.7	88.0	87.5	0.82	6.02	8.3	19.9	3.0	3.8	0.012	41	57	
4	M2BAX 112MLA 4	3GBA112410--D	1449	88.6	88.7	87.9	0.80	8.15	9.7	26.5	3.5	4.2	0.015	50	60	
5,5	M2BAX 132SMA 4	3GBA132210--D	1458	89.6	90.2	90.1	0.81	10.9	7.0	36.0	2.3	3.2	0.030	67	68	
7,5	M2BAX 132MLA 4	3GBA132410--D	1456	90.4	90.9	90.6	0.82	14.6	7.6	49.0	2.3	3.4	0.039	84	59	
11	M2BAX 160MLA 4	3GBA162410--F	1477	91.4	91.8	91.1	0.82	21.1	7.6	71.3	2.6	3.3	0.11	136	61	
15	M2BAX 160MLB 4	3GBA162420--F	1472	92.1	92.4	92.1	0.82	28.7	7.9	97.0	2.9	3.3	0.14	161	66	
18,5	M2BAX 180MLA 4	3GBA182410--F	1470	92.6	92.8	92.4	0.79	36.5	9.2	120	3.6	4.1	0.14	169	66	
22	M2BAX 180MLB 4	3GBA182420--F	1470	93.0	93.2	92.9	0.82	41.6	8.9	143	3.7	4.1	0.17	198	65	
30	M2BAX 200MLA 4	3GBA202410--F	1481	93.6	94.0	93.5	0.82	56.3	10.0	193	3.9	3.0	0.32	282	69	
37	M2BAX 225SMA 4	3GBA222210--F	1479	93.9	94.4	94.3	0.84	67.7	7.7	239	3.1	2.9	0.38	278	63	
45	M2BAX 225SMB 4	3GBA222220--F	1481	94.2	94.3	94.0	0.81	85.1	8.2	290	3.7	3.5	0.42	293	67	
55	M2BAX 250SMA 4	3GBA252210--F	1479	94.6	94.7	94.0	0.83	102	10.1	352	4.4	3.4	0.62	386	74	
75	M2BAX 280SMF 4	3GBA282260--F	1481	95.0	95.2	95.1	0.83	137	7.9	484	3.5	3.5	0.96	530	68	
90	M2BAX 280SMG 4	3GBA282270--F	1482	95.2	95.3	95.2	0.85	161	8.4	580	3.8	3.9	1.2	593	68	
110	M2BAX 315SMB 4	3GBA312220--M	1489	95.4	95.4	94.8	0.85	196	7.0	705	2.1	3.0	2.4	823	71	
132	M2BAX 315SMC 4	3GBA312230--M	1488	95.6	95.8	95.3	0.86	231	6.7	847	2.2	2.9	2.9	892	71	
160	M2BAX 315SMD 4	3GBA312240--M	1488	95.8	96.0	95.8	0.85	282	6.9	1026	2.2	3.0	3.2	933	71	
200	M2BAX 315MLB 4	3GBA312420--M	1487	96.0	96.4	96.4	0.86	351	6.8	1284	2.4	3.0	3.9	1091	74	
250	M2BAX 355SMA 4	3GBA352210--M	1491	96.0	96.0	95.6	0.86	435	6.4	1601	2.1	2.9	5.9	1445	78	
315	M2BAX 355SMB 4	3GBA352220--M	1491	96.0	96.0	95.6	0.86	545	6.7	2018	2.3	3.0	6.9	1595	78	
355	M2BAX 355SMC 4	3GBA352230--M	1490	96.0	96.2	95.8	0.86	616	6.3	2273	2.3	2.8	7.2	1635	78	

Technical data

IE3 General performance cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE3 efficiency class according to IEC 60034-30-1; 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current			Torque			Moment of inertia $J = 1/4$ $GD_2 \text{kgm}_2$	Weight kg	Sound pressure Level L_{PA} dB
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor Cos	I_n A	I_s/I_n	T_n Nm	T_i/T_n	T_b/T_n				
1000 r/min = 6 poles			400 V 50Hz					CENELEC-design								
0,18	M2BAX 71MB 6	3GBA073320---D	931	63.9	60.0	53.2	0.69	0.60	3.8	1.90	2.1	2.6	0.0010	10	39	
0,25	M2BAX 71MLA 6	3GBA073410---D	926	68.6	66.3	60.9	0.67	0.80	4.3	2.6	2.6	2.9	0.0014	13	46	
0,37	M2BAX 80MC 6	3GBA083330---D	940	73.5	71.2	66.4	0.67	1.08	5.8	3.8	2.8	3.2	0.0024	17	42	
0,55	M2BAX 80MLA 6	3GBA083410---D	943	77.2	75.9	71.9	0.68	1.54	6.3	5.6	3.4	3.5	0.0035	23	48	
0,75	M2BAX 90SLA 6	3GBA093010---D	941	78.9	78.0	75.2	0.68	2.0	4.6	7.6	2.4	2.9	0.0044	23	50	
1,1	M2BAX 90LB 6	3GBA093520---D	946	81.0	80.0	77.0	0.66	3.0	5.4	11.0	3.0	3.6	0.0064	30	53	
1,5	M2BAX 100LKA 6	3GBA103810---D	952	82.5	82.3	80.3	0.72	3.6	5.6	15.1	2.3	3.1	0.0098	37	51	
2,2	M2BAX 112MLA 6	3GBA113410---D	951	84.3	84.2	82.6	0.71	5.3	5.8	22.0	2.7	3.5	0.013	46	51	
3	M2BAX 132SMA 6	3GBA133210---D	968	85.6	86.1	84.9	0.68	7.4	6.7	29.6	2.1	3.2	0.029	65	48	
4	M2BAX 132SMB 6	3GBA133220---D	971	86.8	86.3	84.3	0.70	9.5	6.6	39.4	2.5	3.5	0.034	71	61	
5,5	M2BAX 132MLA 6	3GBA133410---D	974	88.0	88.5	88.3	0.67	13.5	5.0	53.9	1.9	2.8	0.051	97	65	
7,5	M2BAX 160MLA 6	3GBA163410---F	979	89.1	89.5	88.9	0.75	15.9	7.6	73.4	1.8	3.1	0.099	131	59	
11	M2BAX 160MLB 6	3GBA163420---F	976	90.3	91.3	91.3	0.78	22.5	7.8	108	1.9	3.0	0.13	161	57	
15	M2BAX 180MLA 6	3GBA183410---F	971	91.2	91.8	91.2	0.75	31.8	9.4	146	2.3	3.6	0.16	197	63	
18,5	M2BAX 200MLA 6	3GBA203410---F	979	91.7	91.9	91.1	0.75	38.8	6.9	180	2.2	3.3	0.21	208	62	
22	M2BAX 200MLB 6	3GBA203420---F	979	92.2	92.4	92.1	0.76	45.3	6.6	215	2.1	3.1	0.26	251	65	
30	M2BAX 225SMA 6	3GBA223210---F	987	92.9	93.2	92.9	0.81	57.4	7.1	290	2.6	2.9	0.59	286	65	
37	M2BAX 250SMA 6	3GBA253210---F	986	93.3	93.6	93.1	0.79	72.4	8.5	353	3.3	3.0	0.83	360	64	
45	M2BAX 280SMF 6	3GBA283260---F	986	93.7	94.2	93.9	0.80	86.6	7.7	434	3.2	3.0	1.6	524	62	
55	M2BAX 280SMG 6	3GBA283270---F	991	94.1	94.3	94.0	0.81	104	7.8	531	3.1	3.1	1.8	563	66	
75	M2BAX 315SMB 6	3GBA313220---M	994	94.6	94.9	94.6	0.84	136	6.8	720	1.8	2.6	4.1	791	75	
90	M2BAX 315SMC 6	3GBA313230---M	994	94.9	95.1	94.7	0.84	164	7.2	864	2.0	3.0	4.6	859	76	
110	M2BAX 315SMD 6	3GBA313240---M	994	95.1	95.3	95.0	0.83	200	7.3	1056	2.2	3.1	4.9	912	75	
132	M2BAX 315MLB 6	3GBA313420---M	995	95.4	95.5	95.1	0.82	242	7.3	1266	2.3	3.2	6.3	1068	72	
160	M2BAX 355SMA 6	3GBA353210---M	993	95.6	95.9	95.6	0.82	292	6.7	1538	2.5	2.6	7.9	1348	75	
200	M2BAX 355SMB 6	3GBA353220---M	993	95.8	96.2	96.1	0.82	365	6.7	1923	2.6	2.5	9.7	1512	75	
250	M2BAX 355SMC 6	3GBA353230---M	993	95.8	96.1	95.8	0.81	464	7.7	2404	3.0	3.1	11.3	1656	75	

Technical data

IE2 General performance cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE2 efficiency class according to IEC 60034-30-1; 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current			Torque			Moment of inertia $J = 1/4$ $GD_2 \text{kgm}_2$	Weight kg	Sound pressure Level L_{PA} dB
			Speed r/min	Full load	3/4 load	1/2 load	Power factor	I_n/A	I_s/I_n	T_N/Nm	T_f/T_N	T_b/T_N				
3000 r/min = 2 poles			400 V 50Hz					CENELEC-design								
0,37	M2BAX 71MA 2	3GBA071310---C	2807	69.5	66.9	62.3	0.79	0.91	5.1	1.26	2.8	3.4	0.00033	9	56	
0,55	M2BAX 71MB 2	3GBA071320---C	2820	74.1	72.4	68.5	0.78	1.31	5.5	1.86	3.2	3.6	0.00041	10	58	
0,75	M2BAX 80MA 2	3GBA081310---C	2843	77.4	76.3	73.7	0.81	1.71	6.2	2.5	2.9	4.3	0.00067	14	63	
1,1	M2BAX 80MB 2	3GBA081320---C	2840	79.6	79.5	77.6	0.83	2.4	6.0	3.7	3.1	3.8	0.00090	15	62	
1,5	M2BAX 90SA 2	3GBA091110---C	2887	81.3	79.9	77.1	0.79	3.4	6.5	5.0	3.0	3.9	0.0021	21	66	
2,2	M2BAX 90LA 2	3GBA091510---C	2894	83.2	83.0	81.4	0.84	4.5	7.7	7.3	3.1	3.8	0.0027	24	67	
3	M2BAX 100LA 2	3GBA101510---C	2919	84.6	83.6	81.3	0.84	6.1	8.7	9.8	4.1	5.0	0.0048	32	74	
4	M2BAX 112MA 2	3GBA111310---C	2916	85.8	85.3	83.1	0.86	7.9	9.1	13.1	4.1	4.7	0.0056	36	74	
5,5	M2BAX 132SA 2	3GBA131110---C	2921	87.0	86.0	83.7	0.85	10.8	8.3	18.0	2.6	4.3	0.012	56	74	
7,5	M2BAX 132SB 2	3GBA131120---C	2916	88.1	87.5	85.7	0.84	14.5	8.7	24.6	3.1	4.5	0.013	60	72	
11	M2BAX 160MLA 2	3GBA161410---C	2931	89.4	89.4	88.3	0.86	20.7	6.6	35.9	2.5	3.5	0.041	103	72	
15	M2BAX 160MLB 2	3GBA161420---C	2938	90.3	90.5	89.8	0.88	27.0	7.6	48.9	3.1	3.5	0.054	116	72	
18,5	M2BAX 160MLC 2	3GBA161430---C	2939	90.9	91.0	90.3	0.87	33.4	7.9	60.1	3.1	3.8	0.060	124	73	
22	M2BAX 180MLA 2	3GBA181410---C	2943	91.3	91.6	90.9	0.87	39.5	8.6	71.4	3.7	3.9	0.074	151	72	
30	M2BAX 200MLA 2	3GBA201410---C	2957	92.0	91.5	90.1	0.85	55.8	8.6	97.1	4.0	4.2	0.11	198	81	
37	M2BAX 200MLB 2	3GBA201420---C	2951	92.5	92.5	92.2	0.90	64.2	7.9	120	3.6	3.7	0.14	229	80	
45	M2BAX 225SMA 2	3GBA221210---C	2962	92.9	92.8	92.1	0.86	80.6	8.8	145	3.8	3.8	0.23	275	82	
55	M2BAX 250SMA 2	3GBA251210---C	2965	94.3	94.3	93.7	0.87	96.4	7.4	177	3.4	3.0	0.34	335	78	
75	M2BAX 280SMD 2	3GBA281240---H	2971	93.8	94.0	93.9	0.89	129	7.7	241	2.7	3.3	0.60	527	78	
90	M2BAX 280SME 2	3GBA281250---H	2970	94.1	94.3	94.2	0.91	152	8.0	289	3.1	3.3	0.70	576	76	
110	M2BAX 315SMA 2	3GBA311210---H	2979	94.3	94.2	93.1	0.90	187	7.6	353	2.5	3.2	0.95	790	78	
132	M2BAX 315SMB 2	3GBA311220---H	2977	94.6	94.6	93.7	0.90	224	7.7	423	2.7	3.1	1.4	840	78	
160	M2BAX 315SMC 2	3GBA311230---H	2976	94.8	95.0	94.4	0.90	269	7.7	513	2.8	3.0	1.7	900	78	
200	M2BAX 315MLA 2	3GBA311410---C	2979	95.0	94.8	93.9	0.89	341	7.2	641	2.4	3.6	2.1	1020	83	
250	M2BAX 355SMA 2	3GBA351210---C	2983	95.0	94.7	93.7	0.89	428	6.7	800	1.5	2.8	2.7	1310	83	
315	M2BAX 355SMB 2	3GBA351220---C	2980	95.0	95.0	94.2	0.89	537	7.2	1009	1.9	2.8	3.4	1450	83	
355	M2BAX 355SMC 2	3GBA351230---C	2983	95.0	95.0	94.3	0.88	609	7.4	1136	2.1	2.7	3.6	1520	83	

Technical data

IE2 General performance cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE2 efficiency class according to IEC 60034-30-1; 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current		Torque		Moment of inertia $J = 1/4$ $GD_2 \text{kgm}_2$	Weight kg	Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor Cos	I_n	I_s/I_n	T_n Nm	T_i/T_n	T_b/T_n			
1500 r/min = 4 poles			400 V 50Hz					CENELEC-design							
0,25	M2BAX 71MA 4	3GBA072310--C	1425	68.5	65.0	58.3	0.69	0.75	4.7	1.69	2.1	3.0	0.00059	9	49
0,37	M2BAX 71MB 4	3GBA072320--C	1420	72.7	72.3	67.6	0.70	1.05	4.5	2.5	2.4	2.9	0.00076	10	46
0,55	M2BAX 80MA 4	3GBA082310--C	1430	77.1	78.6	77.2	0.78	1.32	5.4	3.7	2.8	2.9	0.00220	15	50
0,75	M2BAX 80MB 4	3GBA082320--C	1446	79.6	78.8	74.9	0.69	1.99	6.6	5.0	3.7	3.9	0.00247	18	53
1,1	M2BAX 90SA 4	3GBA092110--C	1447	81.4	79.6	75.6	0.71	2.7	6.6	7.4	3.9	4.3	0.00370	22	51
1,5	M2BAX 90LA 4	3GBA092510--C	1444	82.8	83.1	81.3	0.73	3.6	6.8	10.0	3.7	4.2	0.00460	24	55
2,2	M2BAX 100LA 4	3GBA102510--C	1445	84.3	83.8	81.5	0.77	4.9	7.3	14.5	3.2	3.9	0.00759	31	55
3	M2BAX 100LB 4	3GBA102520--C	1443	85.5	85.2	83.4	0.77	6.6	7.6	19.8	3.8	4.3	0.00939	35	58
4	M2BAX 112MA 4	3GBA112310--C	1442	86.6	86.2	84.6	0.78	8.6	7.5	26.5	4.0	4.3	0.012	41	56
5,5	M2BAX 132SA 4	3GBA132110--C	1457	87.7	87.5	86.2	0.77	11.7	6.9	36.0	2.5	3.4	0.026	59	65
7,5	M2BAX 132MA 4	3GBA132310--C	1457	88.7	88.6	87.4	0.77	16	7.2	49.1	2.6	3.6	0.032	70	67
11	M2BAX 160MLA 4	3GBA162410--C	1466	89.8	89.9	89.2	0.78	22.8	7.0	71.5	3.3	3.2	0.078	111	66
15	M2BAX 160MLB 4	3GBA162420--C	1468	90.6	91.1	90.5	0.81	29.5	8.0	97.7	3.2	3.7	0.10	126	66
18,5	M2BAX 180MLA 4	3GBA182410--C	1470	91.2	91.4	90.5	0.79	36.9	8.5	120	3.7	4.2	0.12	156	65
22	M2BAX 180MLB 4	3GBA182420--C	1472	91.6	91.3	90.2	0.77	45.0	9.2	143	4.1	4.6	0.14	169	66
30	M2BAX 200MLA 4	3GBA202410--C	1476	92.3	92.4	92.0	0.81	58.4	6.8	194	3.0	3.2	0.24	222	68
37	M2BAX 225SMA 4	3GBA222210--C	1479	92.7	92.7	92.2	0.82	70.6	7.4	239	3.1	3.3	0.35	265	69
45	M2BAX 225SMB 4	3GBA222220--C	1481	93.1	92.9	92.3	0.80	87.2	7.9	290	3.4	3.4	0.42	292	69
55	M2BAX 250SMA 4	3GBA252210--C	1480	93.5	93.4	92.7	0.82	104	7.6	355	3.3	3.3	0.53	340	77
75	M2BAX 280SMD 4	3GBA282240--H	1480	94.0	94.1	93.8	0.83	138	8.4	484	3.3	3.5	0.90	520	70
90	M2BAX 280SME 4	3GBA282250--H	1480	94.2	94.3	94.0	0.86	160	7.8	581	3.3	3.4	1.1	583	70
110	M2BAX 315SMA 4	3GBA312210--H	1485	94.5	94.8	94.4	0.85	195	7.2	707	2.9	3.0	2.3	750	68
132	M2BAX 315SMB 4	3GBA312220--H	1484	94.7	95.0	94.7	0.88	228	7.3	849	3.0	2.9	2.6	855	68
160	M2BAX 315SMC 4	3GBA312230--H	1484	94.9	95.1	94.7	0.85	283	7.5	1030	3.4	3.1	2.9	900	68
200	M2BAX 315MLA 4	3GBA312410--C	1486	95.1	95.2	94.6	0.86	356	7.0	1285	2.3	2.8	3.5	995	78
250	M2BAX 355SMA 4	3GBA352210--C	1488	95.1	95.1	94.2	0.85	445	6.7	1604	2.0	2.6	5.4	1400	82
315	M2BAX 355SMB 4	3GBA352220--C	1488	95.1	95.1	94.3	0.85	560	7.3	2021	2.2	2.7	6.9	1570	82
355	M2BAX 355SMC 4	3GBA352230--C	1487	95.1	95.3	94.7	0.86	623	6.8	2279	2.4	2.7	7.2	1650	82

Technical data

IE2 General performance cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE2 efficiency class according to IEC 60034-30-1; 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current			Torque			Moment of inertia $J = 1/4$ $GD_2 \text{kgm}_2$	Weight kg	Sound pressure Level L_{PA} dB
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor Cos	$I_n A$	I_s/I_n	$T_N \text{Nm}$	T_f/T_N	T_b/T_N				
1000 r/min = 6 poles			400 V 50Hz					CENELEC-design								
0,18	M2BAX 71MA 6	3GBA073310---C	910	56.6	52.1	44.4	0.71	0.63	3.3	1.87	2.0	2.4	0.00082	9	40	
0,25	M2BAX 71MB 6	3GBA073320---C	905	61.6	58.9	52.3	0.70	0.82	3.6	2.6	2.4	2.6	0.0011	10	47	
0,37	M2BAX 80MA 6	3GBA083310---C	936	67.6	67.2	62.9	0.73	1.08	4.4	3.8	2.6	2.8	0.0019	14	47	
0,55	M2BAX 80MB 6	3GBA083320---C	931	73.1	71.1	66.5	0.68	1.59	4.7	5.7	3.0	3.0	0.0027	19	47	
0,75	M2BAX 90SA 6	3GBA093110---C	951	75.9	73.3	68.2	0.60	2.4	4.9	7.6	3.3	3.7	0.0044	22	50	
1,1	M2BAX 90LA 6	3GBA093510---C	936	78.1	76.5	73.0	0.65	3.2	4.6	11.1	3.0	3.3	0.0051	25	48	
1,5	M2BAX 100LA 6	3GBA103510---C	957	79.8	78.1	74.0	0.63	4.4	5.7	15.0	2.6	3.3	0.0080	31	56	
3	M2BAX 132SA 6	3GBA133110---C	966	83.3	82.6	80.8	0.64	8.1	5.6	29.4	1.9	3.0	0.025	57	62	
4	M2BAX 132MA 6	3GBA133310---C	964	84.6	84.3	82.7	0.69	9.9	6.4	39.8	2.7	3.3	0.029	65	59	
5,5	M2BAX 132MB 6	3GBA133320---C	964	86.0	85.9	84.6	0.66	14.0	5.8	54.2	2.2	2.9	0.040	79	62	
7,5	M2BAX 160MLA 6	3GBA163410---C	974	87.2	87.5	86.9	0.74	16.4	6.6	73.7	2.0	3.2	0.081	114	65	
11	M2BAX 160MLB 6	3GBA163420---C	971	88.7	89.3	89.7	0.78	22.9	6.6	108	1.3	2.8	0.10	134	57	
15	M2BAX 180MLA 6	3GBA183410---C	971	89.7	90.0	89.6	0.76	32.0	7.4	147	2.4	3.9	0.14	169	62	
18,5	M2BAX 200MLA 6	3GBA203410---C	978	90.4	90.7	90.0	0.76	38.5	6.1	181	2.0	2.9	0.20	205	61	
22	M2BAX 200MLB 6	3GBA203420---C	978	90.9	91.1	90.5	0.76	45.6	6.2	215	1.8	2.9	0.23	219	62	
30	M2BAX 225SMA 6	3GBA223210---C	987	91.7	91.5	90.5	0.78	60.6	7.0	290	2.7	3.2	0.58	284	64	
37	M2BAX 250SMA 6	3GBA253210---C	986	92.2	92.5	91.9	0.80	71.9	6.9	359	2.6	2.9	0.78	337	66	
45	M2BAX 280SMD 6	3GBA283240---H	990	92.7	92.8	92.4	0.80	88.2	7.1	434	2.7	3.1	1.3	498	62	
55	M2BAX 280SME 6	3GBA283250---H	989	93.1	93.2	92.8	0.81	105	6.9	531	2.7	2.9	1.5	523	66	
75	M2BAX 315SMA 6	3GBA313210---C	992	93.7	93.7	92.6	0.81	143	7.0	721	2.1	2.7	3.2	705	75	
90	M2BAX 315SMB 6	3GBA313220---C	992	94.0	94.1	93.2	0.83	165	7.2	866	2.1	2.7	4.1	800	75	
110	M2BAX 315SMC 6	3GBA313230---C	992	94.3	94.4	93.7	0.83	203	7.0	1058	2.2	2.7	4.9	870	75	
132	M2BAX 315MLA 6	3GBA313410---C	992	94.6	94.7	94.0	0.83	243	7.2	1270	2.4	2.7	5.8	980	75	
160	M2BAX 355SMA 6	3GBA353210---C	992	94.8	94.9	94.2	0.83	293	6.2	1540	2.1	2.3	7.3	1290	77	
200	M2BAX 355SMB 6	3GBA353220---C	992	95.0	95.2	94.6	0.84	360	6.5	1925	2.1	2.3	9.7	1440	77	
250	M2BAX 355SMC 6	3GBA353230---C	991	95.0	95.2	94.8	0.84	450	6.7	2409	2.3	2.3	11.3	1590	77	

Technical data

IE1 General performance cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE1 efficiency class according to IEC 60034-30-1; 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current			Torque			Moment of inertia $J = 1/4$ $GD_2 \text{kgm}_2$	Weight kg	Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor Cos	I_n/A	I_s/I_n	$T_N \text{Nm}$	T_f/T_N	T_b/T_N					
3000 r/min = 2 poles			400 V 50Hz					CENELEC-design									
0,37	M2BAX 71MA 2	3GBA071310---T	2797	63.9	61.4	55.9	0.78	0.91	5.3	1.24	2.9	3.6	0.00033	9	56		
0,55	M2BAX 71MB 2	3GBA071320---T	2811	69.0	67.5	63.5	0.79	1.30	5.4	1.85	3.0	3.5	0.00041	10	58		
0,75	M2BAX 80MA 2	3GBA081310---T	2843	72.1	70.8	67.6	0.81	1.71	6.2	2.5	2.9	4.3	0.00067	14	63		
1,1	M2BAX 80MB 2	3GBA081320---T	2840	75.0	74.9	72.7	0.83	2.4	6.0	3.7	3.1	3.8	0.0009	15	62		
1,5	M2BAX 90SA 2	3GBA091110---T	2887	77.2	75.4	72.0	0.79	3.4	7.0	4.9	3.0	3.9	0.0021	21	66		
2,2	M2BAX 90LA 2	3GBA091510---T	2894	79.7	79.5	77.6	0.84	4.5	7.7	7.25	3.1	3.8	0.0027	24	67		
3	M2BAX 100LA 2	3GBA101510---T	2919	81.5	80.3	77.5	0.84	6.1	8.7	9.8	4.1	5.0	0.0048	32	74		
4	M2BAX 112MA 2	3GBA111310---T	2916	83.1	82.4	79.8	0.86	7.9	9.1	13.1	4.1	4.7	0.00561	36	74		
5,5	M2BAX 132SA 2	3GBA131110---T	2921	84.7	83.4	80.7	0.85	10.8	8.3	18.0	2.6	4.3	0.0117	56	74		
7,5	M2BAX 132SB 2	3GBA131120---T	2916	86.0	85.3	83.3	0.84	14.5	8.7	24.6	3.1	4.5	0.0132	60	72		
11	M2BAX 160MLA 2	3GBA161410---T	2931	87.6	87.6	86.3	0.86	20.7	6.6	35.9	2.5	3.5	0.041	103	72		
15	M2BAX 160MLB 2	3GBA161420---T	2938	88.7	89.0	88.1	0.88	27.0	7.6	48.9	3.1	3.5	0.0538	116	72		
18,5	M2BAX 160MLC 2	3GBA161430---T	2939	89.3	89.5	88.6	0.87	33.4	7.9	60.1	3.1	3.8	0.06	124	73		
22	M2BAX 180MLA 2	3GBA181410---T	2943	89.9	90.3	89.6	0.87	39.5	8.6	71.4	3.7	3.9	0.0735	151	72		
30	M2BAX 200MLA 2	3GBA201410---T	2957	90.7	90.1	88.5	0.85	55.8	8.6	97.1	4.0	4.2	0.11	198	81		
37	M2BAX 200MLB 2	3GBA201420---T	2951	91.2	91.2	90.8	0.90	64.2	7.9	120	3.6	3.7	0.141	229	80		
45	M2BAX 225SMA 2	3GBA221210---T	2962	91.7	91.6	90.7	0.86	80.6	8.8	145	3.8	3.8	0.226	275	82		
55	M2BAX 250SMA 2	3GBA251210---T	2965	92.1	92.0	91.2	0.87	96.4	7.4	177	3.4	3.0	0.344	335	78		
75	M2BAX 280SMD 2	3GBA281240---T	2971	92.7	93.0	92.8	0.89	129	7.7	241	2.7	3.3	0.6	527	78		
90	M2BAX 280SME 2	3GBA281250---T	2970	93.0	93.2	93.1	0.91	152	8.0	289	3.1	3.3	0.7	576	76		
110	M2BAX 315SMA 2	3GBA311210---T	2981	93.3	92.8	91.2	0.84	199	7.7	352	2.0	3.2	1.2	767	78		
132	M2BAX 315SMB 2	3GBA311220---T	2978	93.5	93.1	91.9	0.86	233	7.8	422	2.4	3.9	1.4	827	78		
160	M2BAX 315SMC 2	3GBA311230---T	2981	93.8	93.7	92.7	0.88	274	7.5	513	2.2	3.7	1.7	917	78		
200	M2BAX 315MLA 2	3GBA311410---T	2979	94.0	93.9	92.8	0.89	341	7.2	641	2.4	3.6	2.1	1037	83		
250	M2BAX 355SMA 2	3GBA351210---T	2983	94.0	93.8	92.6	0.89	428	6.7	800	1.5	2.8	2.7	1329	83		
315	M2BAX 355SMB 2	3GBA351220---T	2980	94.0	94.0	93.1	0.89	537	7.2	1009	1.9	2.8	3.4	1469	83		
355	M2BAX 355SMC 2	3GBA351230---T	2983	94.0	94.0	93.2	0.88	609	7.4	1136	2.1	2.7	3.6	1539	83		

Technical data

IE1 General performance cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE1 efficiency class according to IEC 60034-30-1; 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current		Torque		Moment of inertia $J = 1/4$ $GD_2 \text{kgm}^2$	Weight kg	Sound pressure Level L_{PA} dB	
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor Cos	I_n A	I_s/I_n	T_N Nm	T_r/T_N	T_b/T_N			
1500 r/min = 4 poles			400 V 50Hz					CENELEC-design							
0,37	M2BAX 71MB 4	3GBA072320---T	1418	66.0	63.2	56.4	0.69	1.08	5.0	2.5	2.5	3.0	0.00076	10	46
0,55	M2BAX 80MA 4	3GBA082310---T	1441	70.0	67.8	62.5	0.73	1.41	6.4	3.7	2.8	3.4	0.00205	15	54
0,75	M2BAX 80MB 4	3GBA082320---T	1446	72.1	71.1	65.7	0.69	1.99	6.6	5.0	3.7	3.9	0.00247	18	53
1,1	M2BAX 90SA 4	3GBA092110---T	1447	75.0	72.6	67.2	0.71	2.7	6.6	7.4	3.9	4.3	0.0037	22	51
1,5	M2BAX 90LA 4	3GBA092510---T	1444	77.2	77.6	75.3	0.73	3.6	6.8	10.0	3.7	4.2	0.0046	24	55
2,2	M2BAX 100LA 4	3GBA102510---T	1445	79.7	79.0	76.1	0.77	4.9	7.3	14.6	3.2	3.9	0.00759	31	55
3	M2BAX 100LB 4	3GBA102520---T	1443	81.5	81.0	78.7	0.77	6.6	7.6	19.8	3.8	4.3	0.00939	35	58
4	M2BAX 112MA 4	3GBA112310---T	1442	83.1	82.6	80.6	0.78	8.6	7.5	26.5	4.0	4.3	0.012	41	56
5,5	M2BAX 132SA 4	3GBA132110---T	1457	84.7	84.4	82.8	0.77	11.7	6.9	36.0	2.5	3.4	0.0257	59	65
7,5	M2BAX 132MA 4	3GBA132310---T	1457	86.0	85.9	84.4	0.77	16.0	7.2	49.1	2.6	3.6	0.032	70	67,3
11	M2BAX 160MLA 4	3GBA162410---T	1466	87.6	87.7	86.8	0.78	22.8	7.0	71.5	3.3	3.2	0.078	111	65,9
15	M2BAX 160MLB 4	3GBA162420---T	1468	88.7	89.4	88.6	0.81	29.5	8.0	97.7	3.2	3.7	0.1	126	65,9
18,5	M2BAX 180MLA 4	3GBA182410---T	1470	89.3	89.6	88.6	0.79	36.9	8.5	120	3.7	4.2	0.12	156	65
22	M2BAX 180MLB 4	3GBA182420---T	1472	89.9	89.6	88.2	0.77	45.0	9.2	143	4.1	4.6	0.139	169	66
30	M2BAX 200MLA 4	3GBA202410---T	1476	90.7	90.9	90.4	0.81	58.4	6.8	194	3.0	3.17	0.236	222	68
37	M2BAX 225SMA 4	3GBA222210---T	1479	91.2	91.2	90.7	0.81	70.6	7.4	239	3.1	3.3	0.35	265	69
45	M2BAX 225SMB 4	3GBA222220---T	1481	91.7	91.5	90.8	0.8	87.2	7.9	290	3.4	3.4	0.416	292	69
55	M2BAX 250SMA 4	3GBA252210---T	1480	92.1	92.0	91.1	0.82	104	7.6	355	3.3	3.3	0.533	340	77
75	M2BAX 280SMD 4	3GBA282240---T	1480	92.7	92.7	92.4	0.83	138	8.4	484	3.3	3.5	0.9	520	70
90	M2BAX 280SME 4	3GBA282250---T	1480	93.0	93.2	92.8	0.86	160	7.8	581	3.3	3.4	1.1	583	70
110	M2BAX 315SMA 4	3GBA312210---T	1488	93.3	93.2	92.2	0.85	197	6.9	706	2.31	2.9	2.3	792	78
132	M2BAX 315SMB 4	3GBA312220---T	1487	93.5	93.5	92.6	0.86	236	6.9	847	2.3	2.7	2.6	847	78
160	M2BAX 315SMC 4	3GBA312230---T	1487	93.8	94.0	93.1	0.85	288	7.2	1027	2.4	2.9	2.9	887	78
200	M2BAX 315MLA 4	3GBA312410---T	1486	94.0	94.1	93.5	0.86	356	7.0	1285	2.3	2.8	3.5	1012	78
250	M2BAX 355SMA 4	3GBA352210---T	1488	94.0	94.0	93.0	0.85	445	6.7	1604	2.0	2.6	5.4	1419	82
315	M2BAX 355SMB 4	3GBA352220---T	1488	94.0	94.0	93.0	0.85	560	7.3	2021	2.2	2.7	6.9	1589	82
355	M2BAX 355SMC 4	3GBA352230---T	1487	94.0	94.3	93.6	0.86	623	6.8	2279	2.4	2.7	7.2	1669	82

Technical data

IE1 General performance cast iron motors

IP 55 - IC 411 - Insulation class F, temperature rise class B

IE1 efficiency class according to IEC 60034-30-1; 2014

Output kW	Motor type	Product code	Efficiency IEC 60034-30-1: 2014					Current			Torque			Moment of inertia $J = 1/4$ $GD_2 \text{kgm}_2$	Weight kg	Sound pressure Level L_{PA} dB
			Speed r/min	Full load 100%	3/4 load 75%	1/2 load 50%	Power factor Cos	I_n	I_s/I_n	T_n Nm	T_i/T_n	T_b/T_n				
1000 r/min = 6 poles			400 V 50Hz					CENELEC-design								
0,37	M2BAX 80MA 6	3GBA083310---T	916	59.7	57.4	50.7	0.71	1.19	3.9	3.9	2.4	2.9	0.00173	14	49	
0,55	M2BAX 80MB 6	3GBA083320---T	932	65.8	63.3	57.4	0.65	1.67	4.7	5.6	3.0	3.1	0.00267	19	47	
0,75	M2BAX 90SA 6	3GBA093110---T	951	70.0	66.8	60.4	0.6	2.4	4.9	7.6	3.3	3.7	0.0044	22	50	
1,1	M2BAX 90LA 6	3GBA093510---T	936	72.9	71.0	66.5	0.65	3.2	4.6	11.1	3.0	3.3	0.0051	25	48	
1,5	M2BAX 100LA 6	3GBA103510---T	957	75.2	73.1	68.2	0.63	4.4	5.7	15.0	2.6	3.3	0.00795	31	56	
2,2	M2BAX 112MA 6	3GBA113310---T	956	77.7	76.1	72.7	0.66	5.9	5.5	21.9	2.8	3.5	0.0116	40	54	
3	M2BAX 132SA 6	3GBA133110---T	966	79.7	78.8	76.6	0.64	8.1	5.5	29.4	1.9	3.0	0.0251	57	62	
4	M2BAX 132MA 6	3GBA133310---T	964	81.4	81.1	79.2	0.69	10.0	6.4	39.8	2.7	3.3	0.0294	65	59	
5,5	M2BAX 132MB 6	3GBA133320---T	964	83.1	82.9	81.4	0.66	14.0	5.8	54.2	2.2	2.9	0.0397	79	62	
7,5	M2BAX 160MLA 6	3GBA163410---T	974	84.7	85.1	84.5	0.74	16.4	6.6	73.7	2.0	3.2	0.0811	114	65	
11	M2BAX 160MLB 6	3GBA163420---T	971	86.4	87.3	87.8	0.78	22.9	6.6	108	1.3	2.8	0.102	134	57	
15	M2BAX 180MLA 6	3GBA183410---T	971	87.7	88.1	87.6	0.76	32.0	7.4	147	2.4	3.9	0.136	169	62	
18,5	M2BAX 200MLA 6	3GBA203410---T	978	88.6	88.9	88.1	0.76	38.5	6.1	181	2.0	2.9	0.204	205	61	
22	M2BAX 200MLB 6	3GBA203420---T	978	89.2	89.4	88.7	0.76	45.6	6.2	215	1.8	2.9	0.227	219	62	
30	M2BAX 225SMA 6	3GBA223210---T	987	90.2	90.0	88.8	0.78	60.6	7.0	290	2.7	3.2	0.579	284	64	
37	M2BAX 250SMA 6	3GBA253210---T	986	90.8	91.1	90.5	0.80	71.9	6.9	359	2.6	2.9	0.783	337	66	
45	M2BAX 280SMD 6	3GBA283240---T	990	91.4	91.6	91.0	0.80	88.2	7.1	434	2.7	3.1	1.3	498	62	
55	M2BAX 280SME 6	3GBA283250---T	989	91.9	91.9	91.6	0.81	105	6.9	531	2.7	2.9	1.5	523	66	
75	M2BAX 315SMA 6	3GBA313210---T	992	92.6	92.6	91.4	0.81	143	7.0	721	2.1	2.7	3.2	722	75	
90	M2BAX 315SMB 6	3GBA313220---T	992	92.9	93.0	92.0	0.83	165	7.2	866	2.1	2.7	4.1	817	75	
110	M2BAX 315SMC 6	3GBA313230---T	992	93.3	93.4	92.7	0.83	203	7.0	1058	2.2	2.7	4.9	887	75	
132	M2BAX 315MLA 6	3GBA313410---T	992	93.5	93.7	92.9	0.83	243	7.2	1270	2.4	2.7	5.8	997	75	
160	M2BAX 355SMA 6	3GBA353210---T	992	93.8	93.9	93.2	0.83	293	6.2	1540	2.1	2.3	7.3	1309	77	
200	M2BAX 355SMB 6	3GBA353220---T	992	94.0	94.3	93.7	0.84	360	6.5	1925	2.1	2.3	9.7	1459	77	
250	M2BAX 355SMC 6	3GBA353230---T	991	94.0	94.3	93.9	0.84	450	6.7	2409	2.3	2.3	11.3	1609	77	

Variant codes

IE2 General performance cast iron motors

Variant codes specify additional options and features to the standard motor. The desired features are listed as three-digit variant codes in the motor order. Note also that there are variants that cannot be used together.

Code/Variants	Frame size												
	80	90	100	112	132	160	180	200	225	250	280	315	355
Administration													
100 Special design according to quotation (production orders).	•	•	•	•	•	•	•	•	•	•	•	•	•
530 Two-year extension on standard warranty	•	•	•	•	•	•	•	•	•	•	•	•	•
531 Sea freight packing	•	•	•	•	•	•	•	•	•	•	•	•	•
533 Wooden sea freight packing	•	•	•	•	•	•	•	•	•	•	•	•	•
683 Prepared for ABB Ability Smart Sensor	-	-	-	-	-	•	•	•	•	•	•	•	•
684 ABB Ability Smart sensor mounted	-	-	-	-	-	•	•	•	•	•	•	•	•
865 One-year extension on standard warranty	•	•	•	•	•	•	•	•	•	•	•	•	•
Balancing													
417 Vibration acc. to Grade B (IEC 60034-14).	•	•	•	•	•	•	•	•	•	•	•	•	•
Bearings and Lubrication													
037 Roller bearing at D-end.	-	-	-	-	-	•	•	•	•	•	•	•	•
040 Heat-resistant grease	•	•	•	•	•	•	•	•	•	•	•	•	•
041 Bearings regreasable via grease nipples.	-	-	-	-	-	•	•	•	•	○	○	○	○
043 SPM compatible nipples for vibration measurement	•	•	•	•	•	•	•	•	•	•	•	•	•
130 Pt100 3-wire in bearings.	-	-	-	-	-	•	•	•	•	•	•	•	•
188 63-series bearing in D-end	•	•	•	•	•	•	•	•	•	•	•	•	•
798 Stainless steel grease nipples	-	-	-	•	•	•	•	•	•	•	•	•	•
800 Grease nipples JIS B 1575 PT 1/8" pin type	•	•	•	•	•	•	•	•	•	•	•	•	•
866 Stainless steel grease nipples, PT1/4"	-	-	-	•	•	•	•	•	•	•	•	•	•
Branch standard designs													
142 Manilla connection.	•	•	•	•	•	•	•	•	•	•	•	•	-
178 Stainless steel / acid proof bolts.	•	•	•	•	•	•	•	•	•	•	•	•	•
209 Non-standard voltage or frequency, (special winding).	•	•	•	•	•	•	•	•	•	•	•	•	•
396 Motor designed for minimum ambient temperature -20 °C to -40 °C, with space heaters (code 450/451 must be added)	•	•	•	•	•	•	•	•	•	•	•	•	•
425 Corrosion protected stator and rotor core.	•	•	•	•	•	•	•	•	•	•	•	•	•
Cooling system													
068 Light alloy metal fan	•	•	•	•	•	•	•	•	•	•	•	•	•
075 Cooling method IC418 (without fan).	•	•	•	•	•	•	•	•	•	•	•	•	•
183 Separate motor cooling (fan axial, N-end).	•	•	•	•	•	•	•	•	•	•	•	•	•
Heating elements													
450 Heating element, 100-120 V	•	•	•	•	•	•	•	•	•	•	•	•	•
451 Heating element, 200 - 240 V	•	•	•	•	•	•	•	•	•	•	•	•	•
Insulation system													
014 Winding insulation class H.	•	•	•	•	•	•	•	•	•	•	•	•	•
405 Special winding insulation for frequency converter supply.	•	•	•	•	•	•	•	•	•	•	•	•	•
Marine													
024 Fulfilling Bureau Veritas (BV) requirements, with certificate.	•	•	•	•	•	•	•	•	•	•	•	•	•
026 Fulfilling Lloyds Register of Shipping (LR) requirements, with certificate.	•	•	•	•	•	•	•	•	•	•	•	•	•
027 Fulfilling American Bureau of Shipping (ABS) requirements, with certificate.	•	•	•	•	•	•	•	•	•	•	•	•	•
050 Fulfilling Registro Italiano Navale (RINA) requirements, with certificate.	•	•	•	•	•	•	•	•	•	•	•	•	•
096 Fulfilling Lloyds Register of Shipping (LR) requirements, without certificate (non-essential duty only)	•	•	•	•	•	•	•	•	•	•	•	•	•
186 Fulfilling DNV requirements, without certificate	•	•	•	•	•	•	•	•	•	•	•	•	•
481 Fulfilling Nippon Kaiji Kyokai (NK) requirements, with certificate.	•	•	•	•	•	•	•	•	•	•	•	•	•
483 Fulfilling China Classification Societies (CCS) requirements (Beijing), with certificate.	•	•	•	•	•	•	•	•	•	•	•	•	•
491 Fulfilling Nippon Kaiji Kyokai (NK) requirements, without certificate.	•	•	•	•	•	•	•	•	•	•	•	•	•
492 Fulfilling Registro Italiano Navale (RINA) requirements, without certificate.	•	•	•	•	•	•	•	•	•	•	•	•	•

○ = Included as standard | • = Available as option | - = Not applicable

Code/Variants	Frame size												
	80	90	100	112	132	160	180	200	225	250	280	315	355
493 Fulfilling China Classification Societies (CCS) requirements (Beijing), without certificate.	•	•	•	•	•	•	•	•	•	•	•	•	•
494 Fulfilling Korea Register of Shipping (KR) requirements, without certificate.	•	•	•	•	•	•	•	•	•	•	•	•	•
496 Fulfilling Bureau Veritas (BV) requirements, without certificate (non-essential duty only)	•	•	•	•	•	•	•	•	•	•	•	•	•
675 Fulfilling American Bureau of Shipping (ABS) requirements, without certificate (non-essential duty only)	•	•	•	•	•	•	•	•	•	•	•	•	•
Mounting arrangements													
008 IM 2101 foot/flange mounted, IEC flange, from IM 1001 (B34 from B3).	•	•	•	•	•	-	-	-	-	-	-	-	-
009 IM 2001 foot/flange mounted, IEC flange, from IM 1001 (B35 from B3).	•	•	•	•	•	•	•	•	•	•	•	•	•
047 IM 3601 flange mounted, IEC flange, from IM 3001 (B14 from B5).	•	•	•	•	•	-	-	-	-	-	-	-	-
066 Modified for specified mounting position differing from IM B3 (1001), IM B5 (3001), B14 (3601), IM B35 (2001), IM B34 (2101)	•	•	•	•	•	•	•	•	•	•	•	•	•
320 IM2001 foot/flat bottom flange mounted, from IM1001 (B35 flat bottom flange from B3)	•	•	•	•	•	•	-	-	-	-	-	-	-
Painting													
114 Special paint color, standard grade	•	•	•	•	•	•	•	•	•	•	•	•	•
115 Painting system C4,durability Medium	•	•	•	•	•	•	•	•	•	•	•	•	•
646 Special paint colour (China)	•	•	•	•	•	•	•	•	•	•	•	•	•
754 Painting system C5, durability Medium	•	•	•	•	•	•	•	•	•	•	•	•	•
Protection													
005 Protective roof	•	•	•	•	•	•	•	•	•	•	•	•	•
072 Radial seal at D-end. Not possible for 2-pole , 280 and 315 frames	•	•	•	•	•	•	•	•	•	•	•	•	•
158 Degree of protection IP65.	•	•	•	•	•	•	•	•	•	•	•	•	•
250 Degree of protection IP66	•	•	•	•	•	•	•	•	•	•	•	•	•
403 Degree of protection IP56.	•	•	•	•	•	•	•	•	•	•	•	•	•
784 Gamma-seal at D-end.	•	•	•	•	•	•	•	•	•	•	•	•	•
Rating & instruction plates													
002 Restamping voltage, frequency and output, continuous duty.	•	•	•	•	•	•	•	•	•	•	•	•	•
095 Restamping output (maintained voltage, frequency), intermittent duty.	•	•	•	•	•	•	•	•	•	•	•	•	•
135 Mounting of additional identification plate, stainless.	•	•	•	•	•	•	•	•	•	•	•	•	•
159 Additional plate with text "Made in"	•	•	•	•	•	•	•	•	•	•	•	•	•
163 Frequency converter rating plate. Rating data according to quotation.	•	•	•	•	•	•	•	•	•	•	•	•	•
Shaft & rotor													
069 Two shaft extensions according to catalog drawings.	•	•	•	•	•	•	•	•	•	•	•	•	•
070 Special shaft extension at D-End, standard shaft material	•	•	•	•	•	•	•	•	•	•	•	•	•
164 Shaft extension with closed keyway	•	•	•	•	•	•	•	•	•	•	•	•	•
410 Shaft material stainless steel	•	•	•	•	•	•	•	•	•	•	•	•	•
600 Special shaft extension at N-end, standard shaft material.	•	•	•	•	•	•	•	•	•	•	•	•	•
Standards and Regulations													
331 Motor not for sale for use in EU	•	•	•	•	•	•	•	•	•	•	•	•	•
586 Fulfilling UK Conformity Assessment (UKCA) requirements.	-	-	-	-	-	-	-	-	-	-	-	-	-
Stator winding temperature sensors													
121 Bimetal detectors, break type (NCC), (3 in series), 130 °C, in stator winding	•	•	•	•	•	•	•	•	•	•	•	•	•
122 Bimetal detectors, break type (NCC), (3 in series), 150 °C, in stator winding	•	•	•	•	•	•	•	•	•	•	•	•	•
435 PTC - thermistors (3 in series), 130 °C, in stator winding	•	•	•	•	•	•	•	•	•	•	•	•	•
439 PTC - thermistors (2x3 in series), 150 °C, in stator winding	-	-	-	-	-	•	•	•	•	•	•	•	•
441 PTC - thermistors (3 in series, 130 °C & 3 in series, 150 °C), in stator winding	•	•	•	•	•	•	•	•	•	•	•	•	•
445 Pt100 2-wire in stator winding, 1 per phase	•	•	•	•	•	•	•	•	•	•	•	•	•
446 Pt100 2-wire in stator winding, 2 per phase	-	-	-	-	-	•	•	•	•	•	•	•	•
502 Pt100 3-wire in stator winding, 1 per phase	-	-	-	-	-	•	•	•	•	•	•	•	•
503 Pt100 3-wire in stator winding, 2 per phase	-	-	-	-	-	•	•	•	•	•	•	•	•
Terminal box													
021 Terminal box LHS (seen from D-end).	•	•	•	•	•	•	•	•	•	•	•	•	•
022 Cable entry LHS (seen from D-end).	•	•	•	•	•	•	•	•	•	•	•	•	•
180 Terminal box RHS (seen from D-end).	•	•	•	•	•	•	•	•	•	•	•	•	•
230 Standard metal cable gland.	•	•	•	•	•	•	•	•	•	•	•	•	•
375 Standard plastic cable gland	•	•	•	•	•	•	•	•	•	•	•	•	•
376 Two standard plastic cable glands	•	•	•	•	•	•	•	•	•	•	•	•	•
400 4 x 90 degr turnable terminal box.	•	•	•	•	•	•	○	○	○	○	○	○	○
413 Extended cable connection, no terminal box.	-	-	-	-	-	•	•	•	•	•	•	•	•
418 Separate terminal box for auxiliaries, standard material.	•	•	•	•	•	•	•	•	•	•	•	•	•
468 Cable entry from D-end.	•	•	•	•	•	•	•	•	•	•	•	•	•

○ = Included as standard | • = Available as option | - = Not applicable

Code/Variants	Frame size												
	80	90	100	112	132	160	180	200	225	250	280	315	355
469 Cable entry from N-end.	•	•	•	•	•	•	•	•	•	•	•	•	•
624 Prepared for inch cable glands according to BSPP standard.	•	•	•	•	•	•	•	•	•	•	•	•	•
730 Prepared for NPT cable glands.	•	•	•	•	•	•	•	•	•	•	•	•	•
731 Two standard metal cable glands.	•	•	•	•	•	•	•	•	•	•	•	•	•
738 Prepared for metric cable glands.	•	•	•	•	•	•	•	•	•	•	•	•	•
740 Prepared for PG cable glands.	•	•	•	•	•	•	•	•	•	•	•	•	•
Testing													
145 Type test report from a catalogue motor, 400V 50Hz.	•	•	•	•	•	•	•	•	•	•	•	•	•
146 Type test with report for one motor from specific delivery batch.	•	•	•	•	•	•	•	•	•	•	•	•	•
148 Routine test report.	•	•	•	•	•	•	•	•	•	•	•	•	•
Variable speed drives													
486 Separate motor cooling (fan top, N-end) and prepared for DC-tacho.	•	•	•	•	•	•	•	•	•	•	•	•	•
701 Insulated bearing at N-end.	-	-	-	-	-	-	-	-	-	-	-	-	-
704 EMC cable entry.	-	-	-	-	-	-	-	-	-	-	-	-	-

○ = Included as standard | • = Available as option | - = Not applicable

Variant codes

IE3 General performance cast iron motors

Variant codes specify additional options and features to the standard motor. The desired features are listed as three-digit variant codes in the motor order. Note also that there are variants that cannot be used together.

Code/Variants	Frame size												
	80	90	100	112	132	160	180	200	225	250	280	315	355
Administration													
100 Special design according to quotation (production orders).	•	•	•	•	•	•	•	•	•	•	•	•	•
530 Two-year extension on standard warranty	•	•	•	•	•	•	•	•	•	•	•	•	•
531 Sea freight packing	•	•	•	•	•	•	•	•	•	•	•	•	•
533 Wooden sea freight packing	•	•	•	•	•	•	•	•	•	•	•	•	•
683 Prepared for ABB Ability Smart Sensor	-	-	-	-	-	•	•	•	•	•	•	•	•
684 ABB Ability Smart sensor mounted	-	-	-	-	-	•	•	•	•	•	•	•	•
865 One-year extension on standard warranty	•	•	•	•	•	•	•	•	•	•	•	•	•
Balancing													
417 Vibration acc. to Grade B (IEC 60034-14).	•	•	•	•	•	•	•	•	•	•	•	•	•
Bearings and Lubrication													
037 Roller bearing at D-end.	-	-	-	-	-	•	•	•	•	•	•	•	•
040 Heat-resistant grease	•	•	•	•	•	•	•	•	•	•	•	•	•
041 Bearings regreasable via grease nipples.	-	-	-	-	-	•	•	•	•	○	○	○	○
043 SPM compatible nipples for vibration measurement	•	•	•	•	•	•	•	•	•	•	•	•	•
130 Pt100 3-wire in bearings.	-	-	-	-	-	•	•	•	•	•	•	•	•
188 63-series bearing in D-end	•	•	•	•	•	•	•	•	•	•	•	•	•
798 Stainless steel grease nipples	-	-	-	•	•	•	•	•	•	•	•	•	•
866 Stainless steel grease nipples, PT1/4"	-	-	-	•	•	•	•	•	•	•	•	•	•
Branch standard designs													
142 Manilla connection.	•	•	•	•	•	•	•	•	•	•	•	•	-
178 Stainless steel / acid proof bolts.	•	•	•	•	•	•	•	•	•	•	•	•	•
209 Non-standard voltage or frequency, (special winding).	•	•	•	•	•	•	•	•	•	•	•	•	•
396 Motor designed for minimum ambient temperature -20 °C to -40 °C, with space heaters (code 450/451 must be added)	•	•	•	•	•	•	•	•	•	•	•	•	•
425 Corrosion protected stator and rotor core.	•	•	•	•	•	•	•	•	•	•	•	•	•
Cooling system													
068 Light alloy metal fan	•	•	•	•	•	•	•	•	•	•	•	•	•
075 Cooling method IC418 (without fan).	•	•	•	•	•	•	•	•	•	-	•	•	•
183 Separate motor cooling (fan axial, N-end).	•	•	•	•	•	•	•	•	•	•	•	•	•
Heating elements													
450 Heating element, 100-120 V	•	•	•	•	•	•	•	•	•	•	•	•	•
451 Heating element, 200 - 240 V	•	•	•	•	•	•	•	•	•	•	•	•	•
Insulation system													
014 Winding insulation class H.	•	•	•	•	•	•	•	•	•	•	•	•	•
405 Special winding insulation for frequency converter supply.	•	•	•	•	•	•	•	•	•	•	•	•	•
Marine													
026 Fulfilling Lloyds Register of Shipping (LR) requirements, with certificate.	•	•	•	•	•	•	•	•	•	•	•	•	•
050 Fulfilling Registro Italiano Navale (RINA) requirements, with certificate.	•	•	•	•	•	•	•	•	•	•	•	•	•
096 Fulfilling Lloyds Register of Shipping (LR) requirements, without certificate (non-essential duty only)	•	•	•	•	•	•	•	•	•	•	•	•	•
186 Fulfilling DNV requirements, without certificate	•	•	•	•	•	•	•	•	•	•	•	•	•
481 Fulfilling Nippon Kaiji Kyokai (NK) requirements, with certificate.	•	•	•	•	•	•	•	•	•	•	•	•	•
484 Fulfilling Korea Register of Shipping (KR) requirements, with certificate.	•	•	•	•	•	•	•	•	•	•	•	•	•
492 Fulfilling Registro Italiano Navale (RINA) requirements, without certificate.	•	•	•	•	•	•	•	•	•	•	•	•	•
496 Fulfilling Bureau Veritas (BV) requirements, without certificate (non-essential duty only)	•	•	•	•	•	•	•	•	•	•	•	•	•
675 Fulfilling American Bureau of Shipping (ABS) requirements, without certificate (non-essential duty only)	•	•	•	•	•	•	•	•	•	•	•	•	•

○ = Included as standard | • = Available as option | - = Not applicable

Code/Variants	Frame size											
	80	90	100	112	132	160	180	200	225	250	280	315
Mounting arrangements												
008 IM 2101 foot/flange mounted, IEC flange, from IM 1001 (B34 from B3).	•	•	•	•	•	-	-	-	-	-	-	-
009 IM 2001 foot/flange mounted, IEC flange, from IM 1001 (B35 from B3).	•	•	•	•	•	•	•	•	•	•	•	•
047 IM 3601 flange mounted, IEC flange, from IM 3001 (B14 from B5).	•	•	•	•	•	-	-	-	-	-	-	-
066 Modified for specified mounting position differing from IM B3 (1001), IM B5 (3001), B14 (3601), IM B35 (2001), IM B34 (2101)	•	•	•	•	•	•	•	•	•	•	•	•
320 IM2001 foot/flat bottom flange mounted, from IM1001 (B35 flat bottom flange from B3)	•	•	•	•	•	•	-	-	-	-	-	-
Painting												
114 Special paint color, standard grade	•	•	•	•	•	•	•	•	•	•	•	•
115 Painting system C4,durability Medium	•	•	•	•	•	•	•	•	•	•	•	•
646 Special paint colour (China)	•	•	•	•	•	•	•	•	•	•	•	•
754 Painting system C5, durability Medium	•	•	•	•	•	•	•	•	•	•	•	•
Protection												
005 Protective roof	•	•	•	•	•	•	•	•	•	•	•	•
072 Radial seal at D-end. Not possible for 2-pole , 280 and 315 frames	•	•	•	•	•	•	•	•	•	•	•	•
158 Degree of protection IP65.	•	•	•	•	•	•	•	•	•	•	•	•
250 Degree of protection IP66	•	•	•	•	•	•	•	•	•	•	•	•
403 Degree of protection IP56.	•	•	•	•	•	•	•	•	•	•	•	•
784 Gamma-seal at D-end.	•	•	•	•	•	•	•	•	•	•	•	•
Rating & instruction plates												
002 Restamping voltage, frequency and output, continuous duty.	•	•	•	•	•	•	•	•	•	•	•	•
095 Restamping output (maintained voltage, frequency), intermittent duty.	•	•	•	•	•	•	•	•	•	•	•	•
135 Mounting of additional identification plate, stainless.	•	•	•	•	•	•	•	•	•	•	•	•
159 Additional plate with text "Made in"	•	•	•	•	•	•	•	•	•	•	•	•
163 Frequency converter rating plate. Rating data according to quotation.	•	•	•	•	•	•	•	•	•	•	•	•
818 Restamping as generator	-	-	-	-	•	•	•	•	•	•	•	•
Shaft & rotor												
069 Two shaft extensions according to catalog drawings.	•	•	•	•	•	•	•	•	•	•	•	•
070 Special shaft extension at D-End, standard shaft material	•	•	•	•	•	•	•	•	•	•	•	•
164 Shaft extension with closed keyway	•	•	•	•	•	•	•	•	•	•	•	•
410 Shaft material stainless steel	•	•	•	•	•	•	•	•	•	•	•	•
600 Special shaft extension at N-end, standard shaft material.	•	•	•	•	•	•	•	•	•	•	•	•
Standards and Regulations												
331 Motor not for sale for use in EU	•	•	•	•	•	•	•	•	•	•	•	•
540 China energy label	•	•	•	•	•	•	•	•	•	•	•	•
544 Australian HE MEPS	•	•	•	•	•	•	•	•	•	•	•	•
564 Singapore MEPS	•	•	•	•	•	•	•	•	•	•	•	•
586 Fulfilling UK Conformity Assessment (UKCA) requirements.	•	•	•	•	•	•	•	•	•	•	•	•
Stator winding temperature sensors												
121 Bimetal detectors, break type (NCC), (3 in series), 130 °C, in stator winding	•	•	•	•	•	•	•	•	•	•	•	•
122 Bimetal detectors, break type (NCC), (3 in series), 150 °C, in stator winding	•	•	•	•	•	•	•	•	•	•	•	•
435 PTC - thermistors (3 in series), 130 °C, in stator winding	•	•	•	•	•	•	•	•	•	•	•	•
439 PTC - thermistors (2x3 in series), 150 °C, in stator winding	-	-	-	-	-	•	•	•	•	•	•	•
441 PTC - thermistors (3 in series, 130 °C & 3 in series, 150 °C), in stator winding	•	•	•	•	•	•	•	•	•	•	•	•
445 Pt100 2-wire in stator winding, 1 per phase	•	•	•	•	•	•	•	•	•	•	•	•
446 Pt100 2-wire in stator winding, 2 per phase	-	-	-	-	-	•	•	•	•	•	•	•
502 Pt100 3-wire in stator winding, 1 per phase	-	-	-	-	-	•	•	•	•	•	•	•
503 Pt100 3-wire in stator winding, 2 per phase	-	-	-	-	-	•	•	•	•	•	•	•
Terminal box												
020 Detached terminal box.	•	•	•	•	•	•	•	•	•	•	•	•
021 Terminal box LHS (seen from D-end).	•	•	•	•	•	•	•	•	•	-	-	-
022 Cable entry LHS (seen from D-end).	•	•	•	•	•	•	•	•	•	•	•	•
180 Terminal box RHS (seen from D-end).	•	•	•	•	•	•	•	•	•	-	-	-
230 Standard metal cable gland.	•	•	•	•	•	•	•	•	•	•	•	•
375 Standard plastic cable gland	•	•	•	•	•	•	•	•	•	-	-	-
376 Two standard plastic cable glands	•	•	•	•	•	•	•	•	•	-	-	-
400 4 x 90 deg! turnable terminal box.	•	•	•	•	•	•	○	○	○	○	○	○
413 Extended cable connection, no terminal box.	-	-	-	-	-	•	•	•	•	•	•	•
418 Separate terminal box for auxiliaries, standard material.	•	•	•	•	•	•	•	•	•	•	•	•
468 Cable entry from D-end.	•	•	•	•	•	•	•	•	•	•	•	•
469 Cable entry from N-end.	•	•	•	•	•	•	•	•	•	•	•	•
624 Prepared for inch cable glands according to BSPP standard.	•	•	•	•	•	•	•	•	•	•	•	•
730 Prepared for NPT cable glands.	•	•	•	•	•	•	•	•	•	•	•	•

○ = Included as standard | • = Available as option | - = Not applicable

Code/Variants	Frame size												
	80	90	100	112	132	160	180	200	225	250	280	315	355
731 Two standard metal cable glands.	•	•	•	•	•	•	•	•	•	•	•	•	•
738 Prepared for metric cable glands.	•	•	•	•	•	•	•	•	•	•	•	•	•
740 Prepared for PG cable glands.	•	•	•	•	•	•	•	•	•	•	•	•	•
Testing													
145 Type test report from a catalogue motor, 400V 50Hz.	•	•	•	•	•	•	•	•	•	•	•	•	•
146 Type test with report for one motor from specific delivery batch.	•	•	•	•	•	•	•	•	•	•	•	•	•
148 Routine test report.	•	•	•	•	•	•	•	•	•	•	•	•	•
Variable speed drives													
701 Insulated bearing at N-end.	-	-	-	-	-	-	-	-	-	•	•	•	•
704 EMC cable entry.	-	-	-	-	-	-	-	-	•	•	•	•	•

○ = Included as standard | • = Available as option | - = Not applicable

Variant codes

IE4 General performance cast iron motors

Variant codes specify additional options and features to the standard motor. The desired features are listed as three-digit variant codes in the motor order. Note also that there are variants that cannot be used together.

Code/Variants	Frame size												
	80	90	100	112	132	160	180	200	225	250	280	315	355
Administration													
531 Sea freight packing	•	•	•	•	•	•	•	•	•	•	•	•	•
Bearings and Lubrication													
037 Roller bearing at D-end.	-	-	-	-	-	•	•	•	•	•	•	•	•
041 Bearings regreasable via grease nipples.	•	•	•	•	•	•	•	•	•	○	○	○	○
043 SPM compatible nipples for vibration measurement	•	•	•	•	•	•	•	•	•	•	•	•	•
Branch standard designs													
178 Stainless steel / acid proof bolts.	•	•	•	•	•	•	•	•	•	•	•	•	•
Cooling system													
068 Light alloy metal fan	•	•	•	•	•	•	•	•	•	•	•	•	•
183 Separate motor cooling (fan axial, N-end).	•	•	•	•	•	•	•	•	•	•	•	•	•
Heating elements													
451 Heating element, 200 - 240 V	•	•	•	•	•	•	•	•	•	•	•	•	•
Mounting arrangements													
008 IM 2101 foot/flange mounted, IEC flange, from IM 1001 (B34 from B3).	•	•	•	•	•	-	-	-	-	-	-	-	-
009 IM 2001 foot/flange mounted, IEC flange, from IM 1001 (B35 from B3).	•	•	•	•	•	•	•	•	•	•	•	•	•
047 IM 3601 flange mounted, IEC flange, from IM 3001 (B14 from B5).	•	•	•	•	•	-	-	-	-	-	-	-	-
066 Modified for specified mounting position differing from IM B3 (1001), IM B5 (3001), B14 (3601), IM B35 (2001), IM B34 (2101)	•	•	•	•	•	•	•	•	•	•	•	•	•
Painting													
114 Special paint color, standard grade	•	•	•	•	•	•	•	•	•	•	•	•	•
Protection													
005 Protective roof	•	•	•	•	•	•	•	•	•	•	•	•	•
072 Radial seal at D-end. Not possible for 2-pole, 280 and 315 frames	•	•	•	•	•	•	•	•	•	•	•	•	-
158 Degree of protection IP65.	•	•	•	•	•	•	•	•	•	•	•	•	•
403 Degree of protection IP56.	•	•	•	•	•	•	•	•	•	•	•	•	•
Rating & instruction plates													
002 Restamping voltage, frequency and output, continuous duty.	•	•	•	•	•	•	•	•	•	•	•	•	•
135 Mounting of additional identification plate, stainless.	•	•	•	•	•	•	•	•	•	•	•	•	•
159 Additional plate with text "Made in"	•	•	•	•	•	•	•	•	•	•	•	•	•
163 Frequency converter rating plate. Rating data according to quotation.	•	•	•	•	•	•	•	•	•	•	•	•	•
Standards and Regulations													
331 Motor not for sale for use in EU	•	•	•	•	•	•	•	•	•	•	•	•	•
Stator winding temperature sensors													
439 PTC - thermistors (2x3 in series), 150 °C, in stator winding	•	•	•	•	•	•	•	•	•	•	•	•	•
445 Pt100 2-wire in stator winding, 1 per phase	•	•	•	•	•	•	•	•	•	•	•	•	•
Terminal box													
022 Cable entry LHS (seen from D-end).	•	•	•	•	•	•	•	•	•	•	•	•	•
230 Standard metal cable gland.	•	•	•	•	•	•	•	•	•	•	•	•	•
400 4 x 90 degr turnable terminal box.	•	•	•	•	•	•	○	○	○	○	○	○	○
418 Separate terminal box for auxiliaries, standard material.	•	•	•	•	•	•	•	•	•	•	•	•	•
468 Cable entry from D-end.	•	•	•	•	•	•	•	•	•	•	•	•	•
469 Cable entry from N-end.	•	•	•	•	•	•	•	•	•	•	•	•	•
Testing													
145 Type test report from a catalogue motor, 400V 50Hz.	•	•	•	•	•	•	•	•	•	•	•	•	•
148 Routine test report.	•	•	•	•	•	•	•	•	•	•	•	•	•
Variable speed drives													
701 Insulated bearing at N-end.	-	-	-	-	-	-	-	-	-	•	•	•	•
704 EMC cable entry.	•	•	•	•	•	•	•	•	•	•	•	•	•

○ = Included as standard | • = Available as option | - = Not applicable

Mechanical design

Bearings

General performance motors are normally fitted with single-row deep-groove ball bearings, as shown in the table below.

If the bearing at the D-end is replaced with a roller bearing (NU- or NJ-), higher radial forces can be handled. Roller bearings are suitable for belt-drive applications and can be ordered with variant code 037.

Motor size	Poles	Standard design		Alternative design	
		Deep groove ball bearings			
		D-end	N-end		
71	2 - 6	6203-2Z/C3	6202-2Z/C3	-	
80 IE1, IE2, IE3	2 - 6	6204-2Z/C3	6203-2Z/C3	-	
80 IE4	2 - 6	6204-2Z/C3	6204-2Z/C3	-	
90 IE1, IE2, IE3	2 - 6	6205-2Z/C3	6204-2Z/C3	-	
90 IE4	2 - 6	6205-2Z/C3	6205-2Z/C3	-	
100 IE1, IE2, IE3	2 - 6	6206-2Z/C3	6205-2Z/C3	-	
100 IE4	2 - 6	6206-2Z/C3	6206-2Z/C3	-	
112 IE1, IE2, IE3	2 - 6	6206-2Z/C3	6205-2Z/C3	-	
112 IE4	2 - 6	6207-2Z/C3	6206-2Z/C3	-	
132 IE1, IE2, IE3	2 - 6	6208-2Z/C3	6208-2Z/C3	NU 308 ECP/C3	
132 IE4	2 - 6	6208-2Z/C3	6208-2Z/C3	-	
160 IE1, IE2, IE3	2 - 6	6209-2Z/C3	6209-2Z/C3	NU 309 ECP/C3	
160 IE4	2 - 6	6309-2Z/C3	6209-2Z/C3	NU 309 ECP/C3	
180 IE1, IE2, IE3	2 - 6	6210-2Z/C3	6209-2Z/C3	NU 310 ECP/C3	
180 IE4	2 - 6	6310-2Z/C3	6210-2Z/C3	NU 310 ECP/C3	
200 IE1, IE2, IE3	2 - 6	6212-2Z/C3	6209-2Z/C3	NU 312 ECP/C3	
200 IE4	2 - 6	6312-2Z/C3	6212-2Z/C3	NU 312 ECP/C3	
225 IE1, IE2, IE3	2 - 6	6213-2Z/C3	6210-2Z/C3	NU 313 ECP/C3	
225 IE4	2 - 6	6313-2Z/C3	6213-2Z/C3	NU 313 ECP/C3	
250 IE1, IE2, IE3	2 - 6	6215-2Z/C3	6212-2Z/C3	NU 315 ECP/C3	
250 IE4	2 - 6	6315-2Z/C3	6215-2Z/C3	NU 315 ECP/C3	
280 IE1, IE2, IE3, IE4	2 - 6	6316/C3	6316/C3	NU 316 ECP/C3	
315 IE1	2	6316/C3	6316/C3	NU 316 ECP/C3	
315 IE1	4-6	6319/C3	6316/C3	NU 319 ECP/C3	
315 IE2, IE3	2	6217/C3	6217/C3	NU 217 ECP/C3	
315 IE2, IE3	4 - 6	6219/C3	6217/C3	NU 219 ECP/C3	
315 IE4	2	6316/C3	6316/C3	NU 316 ECP/C3	
315 IE4	4 - 6	6319/C3	6316/C3	NU 319 ECP/C3	
355 IE1	2	6316/C3	6316/C3	NU 316 ECP/C3	
355 IE1	4-6	6322/C3	6316/C3	NU 322 ECP/C3	
355 IE2, IE3	2	6219/C3	6219/C3	NU 219 ECP/C3	
355 IE2, IE3	4 - 6	6222/C3	6219/C3	NU 222 ECP/C3	
355 IE4	2	6316/C3	6316/C3	NU 316 ECP/C3	
355 IE4	4 - 6	6322/C3	6316/C3	NU 322 ECP/C3	

Axially-locked bearings

All motors are equipped as standard with an axially locked bearing at the D-end.

Mechanical design

Radial forces

Permissible loading on the shaft

The following table shows permissible radial forces on the shaft in Newtons, assuming zero axial force, a 25 °C ambient temperature, and normal conditions. The values are given for a calculated bearing life of 20 000 and 40 000 hours per motor size.

These calculated values further assume mounting position IM B3 (foot-mounted), with force directed sideways. In some cases, the strength of the shaft affects permissible forces.


Permissible loads of simultaneous radial and axial forces can be supplied on request.

If the radial force is applied between points X_0 and X_{max} , the permissible force F_R can be calculated with the following formula:

$$F_R = F_{x0} - \frac{X}{E} (F_{x0} - F_{xmax})$$

Where

E length of the shaft extension in the standard version

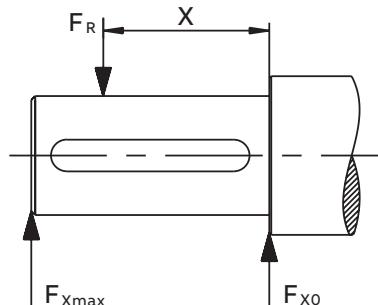

Permissible radial forces for IE4 motors

Permissible radial forces for IE4 motors

Motor size	Poles	Length of shaft extension E (mm)	Mounting arrangement IM B3			
			Deep groove ball bearings			
			20000h	40000h	F _{x0}	F _{xmax}
80	2	40	725	610	575	480
	4	40	925	790	730	625
	6	40	1060	905	835	715
90S	2	50	785	640	490	400
90SL	2	50	800	675	495	420
	4	50	1005	850	790	670
	6	50	1155	975	910	770
100	2	60	1115	940	840	710
	4	60	1390	1175	1090	920
	6	60	1610	1360	1270	1070
112	2	60	1470	1250	1160	985
	4	60	1845	1565	1450	1230
	6	60	2115	1795	1670	1415
132S	2	80	1635	1295	1290	1020
	4	80	2040	1615	1600	1270
	6	80	2350	1865	1850	1465
132SM	2	80	1655	1350	1300	1060
	4	80	2055	1675	1605	1310
	6	80	2350	1920	1840	1500
160	2	110	3045	2420	2385	1900
	4	110	3835	3120	3000	2440
	6	110	4360	3545	3405	2770
180	2	110	3535	2900	2775	2275
	4	110	4450	3650	3490	2865
	6	110	5045	4135	3950	3235
200	2	110	4575	3825	3570	2990
	4	110	5840	4885	4575	3830
	6	110	6660	5570	5215	4360
225	2	110	5290	4480	4145	3510
	4	140	6635	5400	5195	4225
	6	140	7560	6150	5910	4805
250	2	140	6500	5305	5100	4160
	4	140	8125	6630	6365	5190
	6	140	9230	7530	7215	5885
280	2	140	6650	5525	5170	4295
	4	140	8365	7140	6470	5525
	6	140	9525	7910	7390	6140
315SM	2	140	6430	5480	4940	4210
	4	170	9810	8100	7570	6250
	6	170	11035	9110	8470	6995
315ML	2	140	6340	5500	4825	4190
	4	170	9735	8215	7470	6300
	6	170	10920	9215	8325	7020
315LK	4	170	9935	8510	7645	6550
	6	170	11105	9515	8485	7270
355SM	2	140	5850	5130	4350	3815
	4	210	12130	10015	9205	7600
	6	210	13740	11345	10395	8580
355ML	2	140	6220	5520	4705	4175
	4	210	12465	10480	9510	8000
	6	210	14060	11820	10675	8980

Permissible radial forces for IE3, IE2 and IE1 motors

Permissible radial forces for IE3, IE2 and IE1 motors

Motor size	Poles	Length of shaft extension E (mm)	Basic design with deep groove ball bearings				Basic design with deep groove roller bearings			
			20,000 h		40,000 h		20,000 h		40,000 h	
			F_{x0} (N)	F_{xmax} (N)	F_{x0} (N)	F_{xmax} (N)	F_{x0} (N)	F_{xmax} (N)	F_{x0} (N)	F_{xmax} (N)
71	2	30	545	465	430	370				
	4	30	685	585	545	465				
	6	30	785	660	620	530				
80	2	40	740	620	585	490				
	4	40	925	775	730	615				
	6	40	1065	890	840	705				
90S	2	50	795	645	625	510				
	4	50	1000	815	790	645				
	6	50	1145	935	905	740				
90L	2	50	795	660	630	520				
	4	50	1005	830	790	655				
	6	50	1150	950	910	750				
100	2	60	1110	895	875	705				
	4	60	1395	1120	1100	885				
	6	60	1605	1290	1265	1020				
112	2	60	1120	925	885	730				
	4	60	1405	1160	1105	915				
	6	60	1615	1335	1275	1050				
132S	2	80	1630	1270	1285	1000				
	4	80	2055	1600	1620	1260				
	6	80	2360	1840	1860	1450				
132M	4	80	2075	1665	1630	1310				
	6	80	2375	1905	1865	1495				
160	2	110	1945	1510	1545	1195				
	4	110	2455	1905	1945	1510				
	6	110	2835	2250	2245	1780				
180	2	110	2095	1705	1660	1350				
	4	110	2640	2145	2090	1700				
	6	110	3025	2460	2395	1950				
200	2	110	2800	2350	2200	1830				
	4	110	3550	2910	2810	2305				
	6	110	4065	3335	3220	2640				
225	2	110	3335	2795	2640	2215				
	4	140	4200	3370	3325	2670				
	6	140	4810	3860	2805	3055				
250	2	140	3965	3220	3140	2550				
	4	140	4995	4060	3995	3215				
	6	140	5715	4645	4525	3675				
280	2	140	6590	5500	5100	4250	22700	7200	18350	7200
	4	140	8310	6930	6430	5360	27900	9500	22550	9500
	6	140	9460	7890	7310	6090	31550	9500	25450	9500
315 IE1	2	140	6540	5670	4970	4310	22700	6400	18250	6400
	4	170	10300	8690	7860	6630	36400	13800	29300	13800
	6	170	11610	9790	8810	7430	40900	13800	23900	13800
315	2	140	4900	4150	3850	3250	14900	6650	12100	6650
	4	170	8000	6650	6350	5250	21200	10350	17200	10350
	6	170	9150	7550	7200	5950	23900	10250	19400	10250
355 IE1	2	140	6030	5280	4460	3910	22050	8000	17650	8000
	4	210	13240	10930	10030	8280	48700	16000	39200	16000
	6	210	14900	12310	11240	9280	54750	16000	43950	16000
355	2	140	6250	5500	4900	4300	17200	7850	13950	7850
	4	210	10500	8700	8250	6800	28050	16250	22750	16250
	6	210	12000	9900	9400	7750	31650	16200	25700	16200

Mechanical design

Axial forces


—
01 Mounting arrangement IM B3

02 Mounting arrangement IM V1


The following tables present permissible axial forces on the shaft in Newtons, assuming zero radial force, a 25 °C ambient temperature, and normal conditions. The values are given for a calculated bearing life of 20,000 and 40,000 hours per motor size.

At 60 Hz, the values must be reduced by 10 percent, and for two-speed motors, the higher speed determines permissible axial force. Permissible loads of simultaneous radial and axial forces can be supplied on request.

For axial force F_{AD} , it is assumed that the D-bearing is locked with a locking ring.



—
01



—
02

Permissible axial forces for IE4 motors

Permissible axial forces for IE4 motors

Motor size	Poles	Length of shaft extension E (mm)	Mounting arrangement IM B3			
			Deep groove ball bearings			
			20,000h		40,000h	
			F _{AD}	F _{AZ}	F _{AD}	F _{AZ}
80	2	40	790	390	645	245
	4	40	980	580	790	390
	6	40	1125	725	895	495
90	2	50	915	355	755	195
	4	50	1125	565	915	355
	6	50	1275	715	1030	470
100	2	60	1200	540	980	320
	4	60	1480	820	1190	530
	6	60	1695	1035	1355	695
112	2	60	1485	825	1195	535
	4	60	1860	1200	1480	820
	6	60	2140	1480	1690	1030
132	2	80	1725	845	1400	520
	4	80	2135	1255	1705	825
	6	80	2440	1560	1935	1055
160	2	110	2705	2005	2110	1410
	4	110	3475	2775	2685	1985
	6	110	4020	3320	3095	2395
180	2	110	3150	2350	2455	1655
	4	110	4050	3250	3130	2330
	6	110	4680	3880	3605	2805
200	2	110	3995	3095	3095	2195
	4	110	5195	4295	4000	3100
	6	110	6035	5135	4630	3730
225	2	110	4415	3665	3390	2640
	4	140	5730	4980	4375	3625
	6	140	6670	5920	5085	4335
250	2	140	5480	4320	4240	3080
	4	140	7065	5905	5420	4260
	6	140	8195	7035	6270	5110
280	2	140	6095	4095	4785	2785
	4	140	7765	5765	6020	4020
	6	140	8990	6990	6935	4935
315SM	2	140	6025	4025	4720	2720
	4	170	8880	6880	6840	4840
	6	170	10225	8225	7815	5815
315ML	2	140	5955	3955	4655	2655
	4	170	8800	6800	6760	4760
	6	170	10115	8115	7710	5710
315LK	4	170	8840	6840	6805	4805
	6	170	10145	8145	7745	5745
355SM	2	140	5630	3915	4340	2630
	4	210	10650	8940	8065	6350
	6	210	12365	10655	9305	7590
355ML	2	140	5755	4040	4460	2745
	4	210	10740	9025	8145	6435
	6	210	12440	10730	9375	7660

Permissible axial forces for IE3, IE2 and IE1 motors

Permissible axial forces for IE3, IE2 and IE1 motors

Motor size	Poles	Length of shaft extension E (mm)	Mounting arrangement IM B3				Mounting arrangement IM V1			
			Deep groove ball bearings				Deep groove ball bearings			
			20.000 h		40.000 h		20.000 h		40.000 h	
			F _{AD} (N)	F ^{AZ} (N)	F _{AD} (N)	F ^{AZ} (N)	F _{AD} (N)	F ^{AZ} (N)	F _{AD} (N)	F ^{AZ} (N)
71	2	30	580	300	465	185				
	4	30	725	445	580	300				
	6	30	810	530	670	390				
80	2	40	750	430	595	275				
	4	40	940	620	750	430				
	6	40	1055	735	870	550				
90	2	50	845	445	675	275				
	4	50	1050	650	840	440				
	6	50	1175	775	935	535				
100	2	60	1175	615	940	380				
	4	60	1465	905	1175	615				
	6	60	1640	1080	1305	745				
112	2	60	1175	615	935	375				
	4	60	1460	900	1170	610				
	6	60	1635	1075	1300	740				
132	2	80	1750	950	1400	600	1900	850	1550	500
	4	80	2200	1400	1750	950	2400	1250	1950	800
160	2	110	1750	1050	1400	700	2050	800	1700	400
	4	110	2200	1500	1700	1050	2650	1150	2200	650
	6	110	2550	1850	2000	1300	2950	1500	2400	950
180	2	110	1800	1100	1450	750	2300	800	1900	400
	4	110	2300	1600	1750	1100	2950	1100	2450	600
	6	110	2650	2000	2050	1400	3300	1550	2700	950
200	2	110	2300	1600	1800	1100	2950	1150	2400	650
	4	110	2950	2300	2300	1600	3850	1650	3200	1000
	6	110	3450	2750	2600	1950	4450	2000	3600	1200
225	2	110	2500	2100	1900	1500	3250	1600	2650	1000
	4	140	3250	2850	2450	2050	4150	2150	3350	1350
	6	140	3800	3400	2850	2500	5000	2650	4050	1700
250	2	140	2950	2450	2250	1750	3950	1800	3200	1100
	4	140	3850	3350	2950	2400	5100	2550	4150	1600
	6	140	4500	3950	3400	2850	6100	2900	5000	1750
280	2	140	6060	4060	4530	2530	6990	3840	5630	2480
	4	140	7380	5380	6010	4010	9100	5295	7285	3480
	6	140	8850	6850	6710	4710	10600	6375	8475	4250
315 IE1	2	140	6120	4120	4760	2760	-	-	-	-
	4	170	9280	7280	7080	5080	-	-	-	-
	6	170	10700	8700	8110	6110	-	-	-	-
315	2	140	4150	2150	3300	1300	6100	450	-	-
	4	170	6600	4600	5100	3100	9250	2300	7700	750
	6	170	7550	5550	5800	3800	10850	2600	9050	750
355 IE1	2	140	5782	4070	4432	2720	-	-	-	-
	4	210	11372	9660	8572	6860	-	-	-	-
	6	210	13172	11460	9852	8140	-	-	-	-
355	2	140	4900	3200	3800	2100	8300	600	-	-
	4	210	8050	6300	6100	4350	12750	2700	10750	700
	6	210	9250	7500	6950	5200	14650	2950	12300	600

Terminal box

Standard terminal box

Standard delivery

Standard delivery if no other information is provided.

Motor size	Pole number	Amount and size of threads	Cable outer diameter mm	Single core cross-section mm ² /phase	Terminal bolt size 6x
71	2-8	2xM16x1.5, M16x1.5	2xØ5-9, Ø5-9	2,5	M4
80-90	2-8	2xM25x1.5, M16x1.5	2xØ11-16, Ø5-9	4	M4
100-132	2-8	2xM32x1.5, M16x1.5	2xØ14-21, Ø5-9	10	M5
160-180	2-8	2xM40x1.5, M16x1.5	2xØ19-27, Ø5-9	35	M6
200 (IE1/IE2/IE3)	2-8	2xM40x1.5, M16x1.5	2xØ19-27, Ø5-9	35	M6
200 (IE4)	2-8	2xM63x1.5, M16x1.5	2xØ37-44, Ø5-9	70	M10
220-250	2-8	2xM63x1.5, M16x1.5	2xØ37-44, Ø5-9	70	M10
280	2-8	2xM63x1.5, 2xM20x1.5	2xØ37-44, 2xØ8-14	2x150	M10
315	2-8	2xM63x1.5, 2xM20x1.5	2xØ37-44, 2xØ8-14	2x240	M12
355	2-8	2xM75x1.5, 2xM20x1.5	2xØ48-60, 2xØ8-14	4x240	M12

Shaft height	Earthing on frame	Earthing in main terminal box
71-132	M5	M5
160-250	M6	M6
280-355	M10	M10

Terminal box

Terminal boxes

The pictures below show standard terminal boxes.

—
01 Terminal box for sizes
71 to 132

02 Terminal box for sizes
160 to 180.

03 Terminal box for sizes
200 to 250

04 Terminal box for sizes
280 to 355

05 Terminal board for
sizes 71 to 132

06 Terminal board for
sizes 160 to 180

07 Terminal board for
sizes 200 to 250


08 Terminal board for
sizes 280 to 355



— 01



— 02

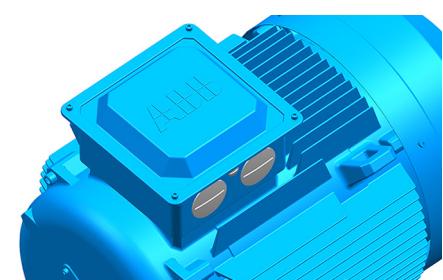


— 03



— 04.




— 05

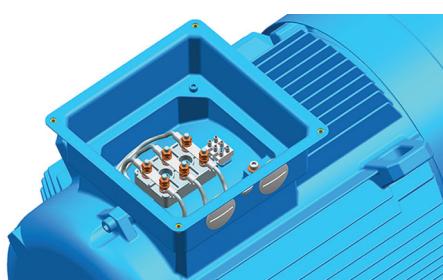

— 06




— 07

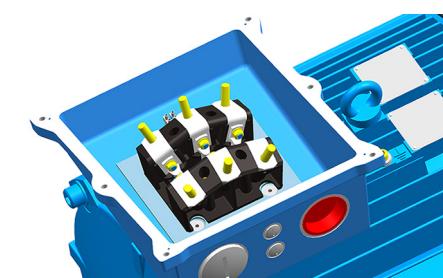

— 08

Dimension drawings

IE4 General performance cast iron motors

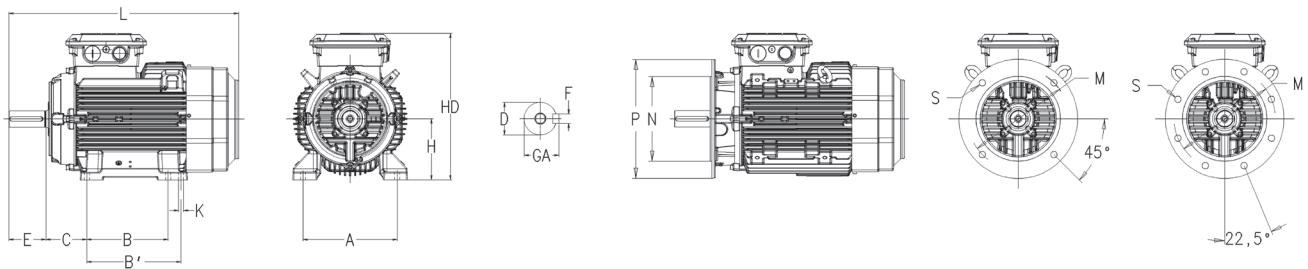

Foot-mounted motor IM1001, B3 and flange-mounted motor IM3001, B5

Motor size	D		GA		F		E		L max		A	B	B'	C	HD max	K	M	N	P	S
	Poles																			
2	4-6	2	4-6	2	4-6	2	4-6	2	4-6	2										
80M	19	19	21,5	21,5	6	6	40	40	312	312	125	100	-	50	192	10	165	130	200	12
80ML ¹⁾	19	19	21,5	21,5	6	6	40	40	337	337	125	100	112	50	192	10	165	130	200	12
80ML ²⁾	19	19	21,5	21,5	6	6	40	40	367	367	125	100	112	50	192	10	165	130	200	12
90S	24	24	27	27	8	8	50	50	339	339	140	100	-	56	217	10	165	130	200	12
90SL	24	24	27	27	8	8	50	50	390	390	140	100	125	56	217	10	165	130	200	12
100LK	28	28	31	31	8	8	60	60	463	463	160	140	160	63	243	12	215	180	250	14,5
112ML	28	28	31	31	8	8	60	60	480	480	190	140	159	70	264	12	215	180	250	14,5
132S	38	38	41	41	10	10	80	80	510	510	216	140	-	89	307	12	265	230	300	14,5
132SM	38	38	41	41	10	10	80	80	560	560	216	140	178	89	307	12	265	230	300	14,5
160ML ³⁾	42	42	45	45	12	12	110	110	626,5	626,5	254	210	254	108	413	14,5	300	250	350	18,5
160ML ⁴⁾	42	42	45	45	12	12	110	110	683,5	683,5	254	210	254	108	413	14,5	300	250	350	18,5
180ML	48	48	51,5	51,5	14	14	110	110	729	729	279	241	279	121	453	14,5	300	250	350	18,5
200ML	55	55	59	59	16	16	110	110	810	810	318	267	305	133	514	18,5	350	300	400	18,5
225SM	55	60	59	64	16	18	110	140	864	894	356	286	311	149	557	18,5	400	350	450	18,5
250SM	60	65	64	69	18	18	140	140	913	913	406	311	349	168	616	24	500	450	550	18,5
280SM ⁵⁾	65	75	69	79,5	18	20	140	140	1182	1182	457	368	419	190	747	24	500	450	550	18,5
280SM ⁶⁾	65	75	69	79,5	18	20	140	140	1052	1052	457	368	419	190	747	24	500	450	550	18,5
315SM	65	80	69	85	18	22	140	170	1216	1246	508	406	457	216	849	28	600	550	560	24
315ML	65	90	69	95	18	25	140	170	1326	1356	508	457	508	216	849	28	600	550	560	24
315LK	-	90	-	95	-	25	-	170	-	1458	508	508	560	216	849	28	600	550	560	24
355SM	70	100	74,5	106	20	28	140	210	1399	1469	610	500	560	254	933	35	740	680	800	24
355ML	70	100	74,5	106	20	28	140	210	1514	1584	610	560	630	254	933	35	740	680	800	24

¹⁾MLA 2, MLA 4, MLA 6

²⁾MLB 4, MLB 6

³⁾MLA 2

⁴⁾MLA 4, MLA 6, MLB 2, MLB 4, MLB 6, MLC 2


⁵⁾SMB2, SMA4, SMB4, SMB6

⁶⁾SMA2, SMA6

IMB14 (IM3601)				
Motor size	M	N	P	S
80M	100	80	120	M6
80ML ¹⁾	100	80	120	M6
80ML ²⁾	100	80	120	M6
90S	115	95	140	M8
90SL	115	95	140	M8
100LK	130	110	160	M8
112ML	130	110	160	M8
132S	165	130	200	M10
132SM	165	130	200	M10

Dimension drawings

IE3 General performance cast iron motors

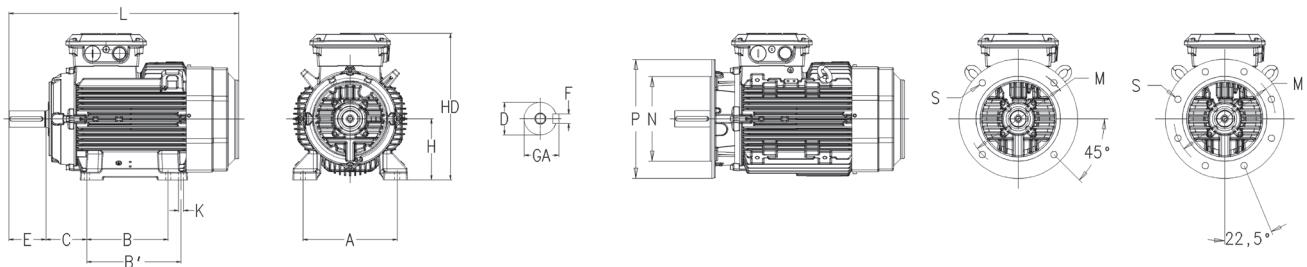


Motor size	IM1001, IMB3 and IM3001, IMB5								IM1001, IMB3						IM B5 (IM3001)					
	D	GA	F	E	L max		A	B	B1	C	HD max	K	M	N	P	S				
	2	4-8	2	4-8	2	4-8	2	4-8	2	4-8										
71M	14	14	16	16	5	5	30	30	257	257	112	90	-	45	175	7	130	110	160	10
71ML	14	14	16	16	5	5	30	30	282	282	112	90	-	45	175	7	130	110	160	10
80M	19	19	21,5	21,5	6	6	40	40	309	309	125	100	-	50	192	10	165	130	200	12
80ML	19	19	21,5	21,5	6	6	40	40	334	334	125	100	112	50	192	10	165	130	200	12
90S	24	24	27	27	8	8	50	50	335	335	140	100	-	56	217	10	165	130	200	12
90SL	24	24	27	27	8	8	50	50	351	351	140	100	125	56	217	10	165	130	200	12
90L_	24	24	27	27	8	8	50	50	386	386	140	125	-	56	217	10	165	130	200	12
100L_	28	28	31	31	8	8	60	60	376	376	160	140	-	63	240	12	215	180	250	14,5
100LK_	28	28	31	31	8	8	60	60	411	411	160	140	160	63	240	12	215	180	250	14,5
112M_	28	28	31	31	8	8	60	60	411	411	190	140	-	70	252	12	215	180	250	14,5
112ML_	28	28	31	31	8	8	60	60	456	456	190	140	159	70	252	12	215	180	250	14,5
132S_	38	38	41	41	10	10	80	80	521	521	216	178	-	89	302	12	265	230	300	14,5
132M_	38	38	41	41	10	10	80	80	586	586	216	178	203	89	302	12	265	230	300	14,5
160 MLA 2	42	42	45	45	12	12	110	110	587	587	254	210	254	108	413	14,5	300	250	350	18,5
160 MLB 2	42	42	45	45	12	12	110	110	587	587	254	210	254	108	413	14,5	300	250	350	18,5
160 MLA 4	42	42	45	45	12	12	110	110	627	627	254	210	254	108	413	14,5	300	250	350	18,5
160 MLA 6	42	42	45	45	12	12	110	110	627	627	254	210	254	108	413	14,5	300	250	350	18,5
160 MLC 2	42	42	45	45	12	12	110	110	684	684	254	210	254	108	413	14,5	300	250	350	18,5
160 MLB 4	42	42	45	45	12	12	110	110	684	684	254	210	254	108	413	14,5	300	250	350	18,5
160 MLB 6	42	42	45	45	12	12	110	110	684	684	254	210	254	108	413	14,5	300	250	350	18,5
180 MLA2	48	48	51,5	51,5	14	14	110	110	684	684	279	241	279	121	434	14,5	300	250	350	18,5
180 MLA4	48	48	51,5	51,5	14	14	110	110	684	684	279	241	279	121	434	14,5	300	250	350	18,5
180 MLA6	48	48	51,5	51,5	14	14	110	110	744	744	279	241	279	121	434	14,5	300	250	350	18,5
180 MLB4	48	48	51,5	51,5	14	14	110	110	744	744	279	241	279	121	434	14,5	300	250	350	18,5
200 MLA6	55	55	59	59	16	16	110	110	728	728	318	267	305	133	473	18,5	350	300	400	18,5
200 MLA2	55	55	59	59	16	16	110	110	828	828	318	267	305	133	473	18,5	350	300	400	18,5
200 MLA4	55	55	59	59	16	16	110	110	828	828	318	267	305	133	473	18,5	350	300	400	18,5
200 MLB2	55	55	59	59	16	16	110	110	828	828	318	267	305	133	473	18,5	350	300	400	18,5
200 MLB6	55	55	59	59	16	16	110	110	828	828	318	267	305	133	473	18,5	350	300	400	18,5
225 SMA2	55	55	59	59	16	16	110	110	854	854	356	286	311	149	539	18,5	400	350	450	18,5
225 SMA4	55	55	59	59	16	16	110	110	812	812	356	286	311	149	539	18,5	400	350	450	18,5
225 SMA6	55	55	59	59	16	16	110	110	812	812	356	286	311	149	539	18,5	400	350	450	18,5
225 SMB4	55	55	59	59	16	16	110	110	812	812	356	286	311	149	539	18,5	400	350	450	18,5
250 SMA2	60	60	64	64	18	18	140	140	882	882	406	311	349	168	585	24	500	450	550	18,5
250 SMA4	60	60	64	64	18	18	140	140	927	927	406	311	349	168	585	24	500	450	550	18,5
250 SMA6	60	60	64	64	18	18	140	140	927	927	406	311	349	168	585	24	500	450	550	18,5
280	65	75	69	79,5	18	20	140	140	1012	1012	457	368	419	190	775	24	500	450	550	18,5
315 SM_	65	80	69	85	18	22	140	170	1216	1246	508	406	457	216	849	28	600	550	660	24
315 ML_	65	90	69	95	18	25	140	170	1326	1356	508	457	508	216	849	28	600	550	660	24
355 SM_	70	100	74,5	106	20	28	140	210	1399	1469	610	500	560	254	933	35	740	680	800	24

IMB14 (IM3601)

Motor size	M	N	P	S	T
71	85	70	105	6	2,5
80	100	80	120	6	3
90	115	95	140	8	3
100	130	110	160	8	3,5
112	130	110	160	8	3,5
132	165	130	200	10	3,5

Dimension drawings

IE2 and IE1 General performance cast iron motors

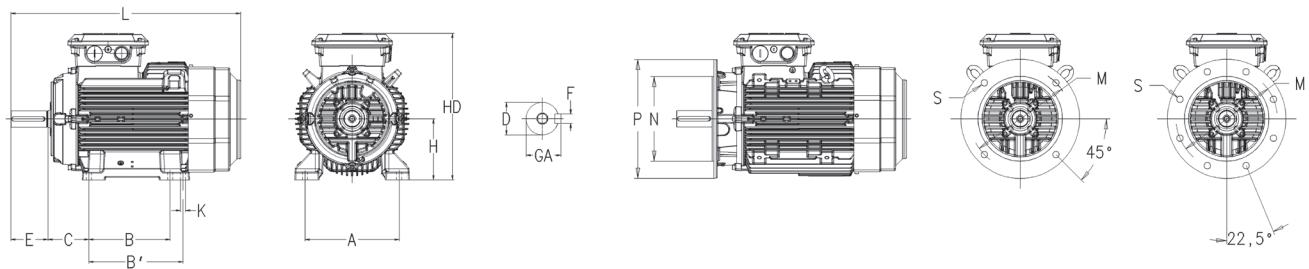

Motor size	IM1001, IMB3 and IM3001, IMB5								IM1001, IMB3						IM B5 (IM3001)					
	D	GA	F	E	L max		A	B	B1	C	HD max	K	M	N	P	S				
	2	4-8	2	4-8	2	4-8	2	4-8	2	4-8										
71M	14	14	16	16	5	5	30	30	257	257	112	90	-	45	175	7	130	110	160	10
71ML	14	14	16	16	5	5	30	30	282	282	112	90	-	45	175	7	130	110	160	10
80M	19	19	21,5	21,5	6	6	40	40	309	309	125	100	-	50	192	10	165	130	200	12
80ML	19	19	21,5	21,5	6	6	40	40	334	334	125	100	112	50	192	10	165	130	200	12
90S	24	24	27	27	8	8	50	50	335	335	140	100	-	56	217	10	165	130	200	12
90SL	24	24	27	27	8	8	50	50	351	351	140	100	125	56	217	10	165	130	200	12
90L ¹⁾	24	24	27	27	8	8	50	50	351	351	140	125	-	56	217	10	165	130	200	12
100L	28	28	31	31	8	8	60	60	376	376	160	140	-	63	240	12	215	180	250	14,5
100LK	28	28	31	31	8	8	60	60	411	411	160	140	160	63	240	12	215	180	250	14,5
112M	28	28	31	31	8	8	60	60	411	411	190	140	-	70	252	12	215	180	250	14,5
112ML	28	28	31	31	8	8	60	60	456	456	190	140	159	70	252	12	215	180	250	14,5
132S	38	38	41	41	10	10	80	80	479	479	216	140	-	89	302	12	265	230	300	14,5
132SM	38	38	41	41	10	10	80	80	521	521	216	140	178	89	302	12	265	230	300	14,5
132M	38	38	41	41	10	10	80	80	521	521	216	178	-	89	302	12	265	230	300	14,5
132ML	38	38	41	41	10	10	80	80	586	586	216	178	203	89	302	12	265	230	300	14,5
160 ¹⁾	42	42	45	45	12	12	110	110	586,5	586,5	254	210	254	108	414	14,5	300	250	350	18,5
160 ²⁾	42	42	45	45	12	12	110	110	626,5	626,5	254	210	254	108	414	14,5	300	250	350	18,5
180	48	48	51,5	51,5	14	14	110	110	683,5	683,5	279	241	279	121	454	14,5	300	250	350	18,5
200	55	55	59	59	16	16	110	110	728	728	318	267	305	133	515	18,5	350	300	400	18,5
225	55	60	59	64	16	18	110	140	824	854	356	286	311	149	560	18,5	400	350	450	18,5
250	60	65	64	69	18	18	140	140	882	882	406	311	349	168	613	24	500	450	550	18,5
280	65	75	69	79,5	18	20	140	140	1012	1012	457	368	419	190	710	24	500	450	550	18,5
315 SM_	65	80	69	85	18	22	140	170	1216	1246	508	406	457	216	849	28	600	550	660	24
315 ML_	65	90	69	95	18	25	140	170	1326	1356	508	457	508	216	849	28	600	550	660	24
355 SM_	70	100	74,5	106	20	28	140	210	1399	1469	610	500	560	254	933	35	740	680	800	24

¹⁾ MLA 2-6, MLB2 2) MLC, MLB4-6

²⁾ MLC, MLB4-6

IMB14 (IM3601)

Motor size	M	N	P	S	T
71	85	70	105	6	2,5
80	100	80	120	6	3
90	115	95	140	8	3
100	130	110	160	8	3,5
112	130	110	160	8	3,5
132	165	130	200	10	3,5

Motors in brief

IE4 cast iron motors, sizes 80 - 132

Motor size		80	90	100	112	132
Stator and end shields	Material	Cast iron				
	Paint colour shade	Munsell blue 8B 4.5/3.25				
	Corrosion class	C3 (medium)				
Feet	Material	Integrated cast iron feet				
Bearings	D-end	6204-2Z/C3	6205-2Z/C3	6206-2Z/C3	6207-2Z/C3	6208-2Z/C3
	N-end	6204-2Z/C3	6205-2Z/C3	6206-2Z/C3	6206-2Z/C3	6208-2Z/C3
Axially-locked bearings	Inner bearing cover	Locked at D-end with retaining ring				
Bearing seal	D-end	V-ring				
	N-end	V-ring				
Lubrication		Permanently lubricated shielded bearings				
Measuring nipples for condition monitoring of the bearings		Not Included				
Rating plate	Material	Stainless steel				
Terminal box	Frame material	Cast iron				
	Cover material	Steel				
	Corrosion class	C3 (medium)				
	Cover screws material	Zinc-electroplated steel				
Connections	Threaded openings	2xM25, 1xM16		2xM32, 1xM16		
	Max Cu-area mm	6		10		
	Terminals	6 terminals for connection with cable lugs				
	Cable glands	Cable glands as option				
Fan	Material	Glass-fiber reinforced polypropylene				
Fan cover	Material	Steel				
	Paint colour shade	Munsell blue 8B 4.5/3.25				
	Corrosion class	C3 (medium)				
Stator winding	Material	Copper				
	Insulation	Insulation class F. Temperature rise class B unless otherwise stated				
	Winding protection	3 PTC thermistors, 150°C				
Rotor winding	Material	Pressure die-cast aluminum				
Balancing		Half-key balancing as standard				
Key ways		Open keyway				
Drain holes		Drain holes with closable plastic plugs, open on delivery				
External earthing bolt		M5				
Enclosure		IP 55 Higher protection on request				
Cooling method		IC 411				
Lifting lug		NA	Integrated cast iron lifting lugs			

Motors in brief

IE4 cast iron motors, sizes 160-250

Motor size		160	180	200	225	250
Stator and end shields	Material	Cast iron				
	Paint colour shade	Munsell blue 8B 4.5/3.25				
	Corrosion class	C3 (medium)				
Feet	Material	Integrated cast iron feet				
Bearings	D-end	6309-2Z/C3	6310-2Z/C3	6312-2Z/C3	6313-2Z/C3	6315-2Z/C3
	N-end	6209-2Z/C3	6210-2Z/C3	6212-2Z/C3	6213-2Z/C3	6215-2Z/C3
Axially-locked bearings	Inner bearing cover	Locked at D-end with inner bearing cover				
Bearing seal	D-end	V-ring				
	N-end	V-ring				
Lubrication		Permanently lubricated shielded bearings				
Measuring nipples for condition monitoring of the bearings		Not Included				
Rating plate	Material	Stainless steel				
Terminal box	Frame material	Steel				
	Cover material	Steel				
	Corrosion class	C3 (medium)				
	Cover screws material	Zinc-electroplated steel				
Connections	Threaded openings	2xM40, 1xM16		2xM63,1xM16		
	Max Cu-area mm	35		70		
	Terminals	6 terminals for connection with cable lugs				
	Cable glands	Cable glands as option				
Fan	Material	Glass-fiber reinforced polypropylene				
Fan cover	Material	Steel				
	Paint colour shade	Munsell blue 8B 4.5/3.25				
	Corrosion class	C3 (medium)				
Stator winding	Material	Copper				
	Insulation	Insulation class F. Temperature rise class B unless otherwise stated				
	Winding protection	3 PTC thermistors, 150°C				
Rotor winding	Material	Pressure die-cast aluminum				
Balancing		Half-key balancing as standard				
Key ways		Open keyway				
Drain holes		Drain holes with closable plastic plugs, open on delivery				
External earthing bolt		M6				
Enclosure		IP 55 Higher protection on request				
Cooling method		IC 411				
Lifting lug		Integrated cast iron lifting lugs				

Motors in brief

IE4 cast iron motors, sizes 280-355

Motor size		280	315	355
Stator and end shields	Material	Cast iron		
	Paint colour shade	Munsell blue 8B 4.5/3.25		
	Corrosion class	C3 (medium)		
Feet	Material	Integrated cast iron feet		
Bearings	D-end	6316/C3	6316/C3 (2P) 6319/C3 (4-8P)	6316/C3 (2P) 6322/C3 (4-8P)
	N-end	6316/C3	6316/C3	6316/C3
	Axially-locked bearings	Inner bearing cover	Locked at D-end with inner bearing cover	
Bearing seal	D-end	V-ring		
	N-end	V-ring		
Lubrication		Regreasable bearings		
Measuring nipples for condition monitoring of the bearings		Not included		
Rating plate	Material	Stainless steel		
Terminal box	Frame material	Cast iron		
	Cover material	Cast iron		
	Corrosion class	C3 (medium)		
	Cover screws material	Zinc-electroplated steel		
Connections	Threaded openings	2xM63, 2xM20	2xM63, 2xM20	2xM75, 2xM20
	Max Cu-area mm	2x150	2x240	4x240
	Terminals	6 terminals for connection with cable lugs		
	Cable glands	Cable glands as option		
Fan	Material	Glass-fiber reinforced polypropylene or Aluminium		
Fan cover	Material	Steel		
	Paint colour shade	Munsell blue 8B 4.5/3.25		
	Corrosion class	C3 (medium)		
Stator winding	Material	Copper		
	Insulation	Insulation class F. Temperature rise class B unless otherwise stated		
	Winding protection	3 PTC thermistors, 150°C		
Rotor winding	Material	Pressure die-cast aluminum		
Balancing		Half-key balancing as standard		
Key ways		Open keyway		
Drain holes		Drain holes with closable plastic plugs, open on delivery		
External earthing bolt		M10		
Enclosure		IP 55 Higher protection on request		
Cooling method		IC 411		
Lifting lug		Bolted lifting lugs		

Motors in brief

IE3, IE2 and IE1 cast iron motors, sizes 71 - 112

Motor size	M2BAX	71	80	90	100	112
Stator and end shields	Material	Cast iron				
	Paint color shade	Munsell blue 8B 4.5/3.25				
	Corrosion class	C3				
Feet	Material	Integrated cast iron				
Bearings	D-end	6203-2Z/C3	6204-2Z/C3	6205-2Z/C3	6206-2Z/C3	6206-2Z/C3
	N-end	6202-2Z/C3	6203-2Z/C3	6204-2Z/C3	6205-2Z/C3	6205-2Z/C3
Axially locked bearings		Locked at D-end with retaining ring				
Bearing seals	D-end	V-ring				
	N-end	V-ring				
Lubrication		Permanently lubricated shielded bearings				
Measuring nipples for condition monitoring of the bearings		Not Included				
Rating plate	Material	Stainless steel				
Terminal box	Material	Steel				
	Corrosion class	C3				
	Cover screws	Zinc-electroplated steel				
Connections	Threaded openings	2xM16	2xM25	2xM32		
	Max Cu-area mm	4	6	10		
	Terminals	6 terminals for connection with cable lugs (not included)				
	Cable glands	Glands as option				
Fan	Material	Glass-fiber reinforced polypropylene				
Fan cover	Material	Steel				
	Paint color shade	Munsell blue 8B 4.5/3.25				
	Corrosion class	C3				
Stator winding	Material	Copper				
	Insulation	Insulation class F. Temperature rise class B unless otherwise stated.				
	Winding protection	3 PTC thermistors, 150°C				
Rotor winding	Material	Pressure die-cast aluminum				
Balancing method		Half key balancing as standard				
Key ways		Open key way				
Drain holes		Drain holes with closable plastic plugs, open on delivery				
Enclosure		IP 55 Higher protection on request				
Cooling method		IC 411				
Lifting lugs		Integrated cast iron lifting lugs				

Motors in brief

IE3, IE2 and IE1 cast iron motors, sizes 132 - 250

Motor size	M2BAX	132	160	180	200	225	250
Stator and end shields	Material	Cast iron					
	Paint color shade	Munsell blue 8B 4.5/3.25					
	Corrosion class	C3					
Feet	Material	Integrated cast iron feet					
Bearings	D-end	6208-2Z/C3	6209-2Z/C3	6210-2Z/C3	6212/C3	6213-2Z/C3	6215-2Z/C3
	N-end	6208-2Z/C3	6209-2Z/C3	6209-2Z/C3	6209-2Z/C3	6210-2Z/C3	6212-2Z/C3
Axially locked bearings		Locked at D-end with retaining ring		Locked at D-end with inner bearing cover			
Bearing seals	D-end	V-ring					
	N-end	V-ring					
Lubrication		Permanently lubricated shielded bearings					
Measuring nipples for condition monitoring of the bearings		Not Included					
Rating plate	Material	Stainless steel					
Terminal box	Material	Steel					
	Corrosion class	C3					
	Cover screws	Zinc-electroplated steel					
Connections	Threaded openings	2xM32	2xM40, 1xM16		2xM63, 1xM16		
	Terminals	6 terminals for connection with cable lugs (not included)					
	Cable glands	Glands as option	Cable flange included, glands as option				
Fan	Material	Glass-fiber reinforced polypropylene					
Fan cover	Material	Steel					
	Paint color shade	Munsell blue 8B 4.5/3.25					
	Corrosion class	C3					
Stator winding	Material	Copper					
	Insulation	Insulation class F. Temperature rise class B unless otherwise stated.					
	Winding protection	3 PTC thermistors, 150 °C					
Rotor winding	Material	Pressure die-cast aluminum					
Balancing method		Half-key balancing as standard					
Key ways		Open key way					
Drain holes		Drain holes with closable plastic plugs, open on delivery					
Enclosure		IP 55 Higher protection on request					
Cooling method		IC 411					
Lifting lugs		Integrated cast iron lifting lug					

Motors in brief

IE3, IE2 and IE1 cast iron motors, sizes 280 - 355

Motor size	M2BAX	280	315, H-gen	315, C/M-gen	355
Stator and end shields	Material	Cast iron			
	Paint color shade	Munsell blue 8B 4.5/3.25			
	Corrosion class	C3			
Feet	Material	Integrated cast iron			
Bearings	D-end, 2 pole	6316/C3	6316/C3	6217/C3	6316/C3
	D-end, 4-6 pole	6316/C3	6319/C3	6219/C3	6316/C3
	N-end, 2-pole	6316/C3	6316/C3	6217/C3	6217/C3
	N-end, 4-6 pole	6316/C3	6316/C3	6217/C3	6217/C3
Axially locked bearings		Locked at D-end with inner bearing cover			
Bearing seals	D-end	V-ring			
	N-end	V-ring			
Lubrication		Regreasable bearings, regreasing nipples M6x1			
Measuring nipples for condition monitoring of the bearings		Not included			
Rating plate	Material	Stainless steel			
Terminal box	Material	Cast iron			
	Cover	Cast iron terminal box cover			
	Corrosion class	C3			
	Cover screws	Zinc-electroplated steel			
Connections	Threaded openings	2xM63, 2 x M20		2xM75, 2 x M20	
	Terminals	6 terminals for connection with cable lugs (not included)			
	Cable glands	Cable glands as option			
Fan	Material	Glass-fiber reinforced polypypropylene / 2-pole metal.			
Fan cover	Material	Steel fan cover			
	Paint color shade	Munsell blue 8B 4.5/3.25			
	Corrosion class	C3			
Stator winding	Material	Copper			
	Insulation	Insulation class F. Temperature rise class B unless otherwise stated.			
	Winding protection	3 PTC thermistors, 150 °C			
Rotor winding	Material	Pressure diecast aluminum			
Balancing method		Half key balancing as standard			
Keyway		Open key way	2x60 W		
Heating elements		60 W			
Enclosure		IP 55 Higher protection on request			
Cooling method		IC 411			
Drain holes		Drain holes with closable plastic plugs, open on delivery			
Lifting lugs		Bolted lifting lugs			

Total product offering

Motors and generators with a complete portfolio of services



IEC motors

- Low voltage motors
- High voltage induction and synchronous motors
- Marine motors
- Motors for explosive atmospheres
- Motors for food and beverage
- Motors for variable speed drives
- Permanent magnet motors
- Synchronous reluctance motors
- Traction motors

NEMA motors

- Low voltage motors
- High voltage induction and synchronous motors
- Marine motors
- Motors for explosive atmospheres
- Motors for variable speed drives
- Permanent magnet motors
- Servomotors
- Washdown motors

Generators

- Generators for wind turbines
- Generators for diesel and gas engine power plants
- Generators for steam and gas turbine power plants
- Generators for marine applications
- Generators for industrial applications
- Generators for traction applications
- Synchronous condensers for reactive power compensation

Life cycle services

ABB's portfolio of drives

Optimal solution for you



Being able to rely on the continuous high performance and efficiency of your operations is something you want to take for granted. ABB variable-frequency drives are made with all this in mind, established upon more than 40 years of experience and backed by a broad range of life cycle services.

ABB drives help you to optimize your processes and systems with state-of-the-art motor control technology, resulting in increased energy efficiency, better product quality, and reduced operating costs with higher output, less downtime, and reduced need for maintenance. All ABB drives are designed for easy selection, ordering, installation and use, and they offer integrated safety features, giving you more time to focus on what matters for you and your business.

Our portfolio offers low-voltage AC and DC drives, medium-voltage AC drives, and motion control drives spanning the fractional-kilowatt to multi-megawatt power level. There is a drive available for essentially every industry and application and for all types of motors, in environments ranging from water utility facilities to clean electrical rooms, and to harsh coal mines and windy offshore platforms to food and beverage production. This wide product range allows you to select the best-fitting drive solution, providing maximum reliability and efficiency for every need.

For more information and contact details:

www.abb.com/motors&generators